





Price list 2024 Devices

Product range

Chapter	Chapter name	Page
	Further services & System overview	
1	Heat cost allocator - Q caloric	2
1.1	▪ New installation - Standard exchange - Conversion installation (P2 + AL2)	3
1.2	▪ New installation - Standard exchange - Conversion installation (P3 + AL2)	5
1.3	▪ Article-Number-Matrix	7
2	Compact heat meters - Q heat	8
2.1	▪ Screw-type meters (QDS) - integrated radio interface	9
2.2	▪ Screw-type meters (QDS)	10
2.3	▪ Screw-type meters (QDS) - integrated M-Bus communication	11
2.4	▪ Measuring capsule (IST) - integrated radio interface	13
2.5	▪ Measuring capsule (IST)	14
2.6	▪ Measuring capsule (AMS) - integrated radio interface	15
2.7	▪ Measuring capsule (AMS)	16
2.8	▪ Measuring capsule (TEC) - integrated radio interface	17
2.9	▪ Measuring capsule (TEC)	18
2.10	▪ Screw-type meters (US) - ultrasonic - integrated radio interface	19
2.11	▪ Screw-type meters (US) - ultrasonic	24
2.12	▪ Article-Number-Matrix (HMC5 / HMR5 / HBR5)	25
2.13	▪ Screw-type meters (US) - ultrasonic Q heat 5.5	28
2.14	▪ Screw-type meters (US) - ultrasonic Q heat 5.5 - plastic	29
2.15	▪ Screw-type meters (US) - ultrasonic Q heat 5.5 - Impuls out or M-Bus	30
2.16	▪ Screw-type meters (US) - ultrasonic Q heat 5.5 - Impuls out or M-Bus - plastic	32
2.17	▪ Screw-type meters (US) - ultrasonic Q heat 5.5 - integrated radio (C-Mode, AMR) - plastic	34
3	Split heat meters - Q heat split	36
3.1	▪ Split heat meters complete - Ultrasonic flow sensors (thread)	37
3.2	▪ Split heat meters complete - Ultrasonic flow sensors (flange)	38
3.3	▪ Split heat meters complete - Woltman flow sensors (flange)	39
3.4	▪ Calculator units	40
3.5	▪ Temperature sensors	41
3.6	▪ Article-Number-Matrix Split heat meters	42
4	Water meters - Q water	44
4.1	▪ Electronic screw-type water meters	45
4.2	▪ Mechanical screw-type water meters	46
4.3	▪ Electronic measuring capsule water meters	50
4.4	▪ Mechanical measuring capsule water meters	53
4.5	▪ Article-Number-Matrix Q water 5.5	55
4.6	▪ Electronic valve and bath meters	56
4.7	▪ Mechanical domestic water meter	58

Product range

Chapter	Chapter name		Page
5	Smoke alarm - Q smoke		60
5.1	▪ Smoke alarm radio with remote inspection (type C) - Ei6500-OMS		61
5.2	▪ Smoke alarm standalone (type A) - Ei650i		62
6	Further system components data readout Q walk-by / Q AMR		64
6.1	▪ Radio add-on modules for mechanical water meters		65
6.2	▪ Radio add-on modules for heat meters		66
6.3	▪ Radio impulse adapter		66
7	Further system components data readout Q AMR		67
7.1	▪ Network nodes		67
7.2	▪ Gateways incl. overview of tariffs Gateway Service Description		68
7.3	▪ Gateway-Tariff-Solution for small Q AMR systems		70
8	Further system components data readout Q M-Bus		72
8.1	▪ Add-on modules for water meters		73
8.2	▪ Add-on modules for heat meters		73
8.3	▪ Impulse input module		73
	General terms and conditions		
	▪ Our conditions of delivery and assembly apply. To be found under www.qundis.com/terms-conditions		

AES-encryption according to OMS

For QUNDIS manufactured measuring devices we offer **free, device-specific AES encryption** in accordance with OMS. If you are interested, please order this from your QUNDIS contact in the office or field sales team.

Automatic decryption is possible on a tariff basis within the QUNDIS Smart Metering Platform (Q SMP). For this purpose an electronic delivery note will be provided as a csv file by e-mail. After import into the Q SMP, decryption takes place.

With Q app the **local AES decryption** of ALL devices purchased from QUNDIS is possible.

Please note: Encrypted devices are excluded from repurchase.



Our systems. Ideal for every property.



Q AMR provides automated meter reading for buildings of all sizes. The values are transmitted securely and reliably to the service provider using a GSM phone network or broadband cable. The data is available immediately for the invoicing of heating and operating costs as well as the display of statistics for the housing industry and consumption patterns.



Q walk-by operates without the need to enter flats or offices. Instead the meter reading service receives the data simply, fast and securely in the publicly accessible areas of the building. Where installations are not too extensive the data can even be recorded from outside the building.



Q M-Bus is based on the European 'meter bus' industrial standard. The main features of this wired remote data reading system are a high level of flexibility and secure data transmission. It is especially recommended for use in buildings where the wireless transmission of data is less suitable because of the design of the building



All devices in the **Q opto** series have a close-range optical interface (IR). With the infrared interface the data exchange is implemented across short distances by infrared light.



Q basic covers devices which are read individually and directly by visual contact. The measuring results are recorded manually by the reader.

Comparison transmission features

mode switch possible with Q suite 5

parallel transmission of telegrams



Q walk-by

improved transmission performance (typ. 10 dbm)

every 112 seconds
10 hours a day (8.00-18.00 hrs)
365 days a year

Q tool + Q app or
Q log 5.5 + current ACT46

Q AMR

improved transmission performance (typ. 10 dbm)

every 450 seconds (7,5 minutes)
24 hours a day
365 days a year


Q node 5.5 + Q gateway 5 or
Q gateway 5.5 direct

read-out requirements:

mode switch possible with Q suite 5

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.

parallel transmission of telegrams



Q walk-by

every 128 seconds
10 hours a day (8.00-18.00 hrs)
monthly: 4 read-out days from the 1st of each month
or: 48 days after the scheduled day
delayed transmission possible (offset)
transmission-free days possible

Q tool + Q app or
Q log 5.5 + current ACT46

Q AMR

every 4 hours
24 hours a day
7 days a week
365 days a year

Q node 5.5 + Q gateway 5

read-out requirements:

Electronic heat cost allocators are radiator-mounted devices capable of measuring its heat output and storing the data acquired. A distinction is made between one-sensor and two-sensor heat cost allocators. One-sensor devices record the radiator temperature and assume a fixed room temperature for consumption calculation. In contrast, two-sensor devices record both the radiator and the room temperatures. Both device types can be used with standard heating systems, with low-temperature heating systems two-sensor devices are mandatory or more suitable. Both device types can display and/or store different values, e.g. the cumulated value at a selectable due date or end-of-the-month values and a fault message in case of an error. There are different systems: Q basic is readout visually and noted manually. With Q opto, the devices have an integrated infrared interface and are readout with a respective device directly at the radiator. Then there are the devices and systems that are readout via radio.



1 | Heat cost allocators



1.1 | Q caloric 5.5 (P2 + AL2)

The heat cost allocators listed below are for installation in new systems (no attachment parts available on the radiator), for standard exchange in systems with existing QUNDIS devices Q caloric 5, 201 and 202 (attachment parts available on the radiator) and for conversion installation in systems with external brands e.g. evaporator (attachment parts partly available).

New installation: suitable installation plate has to be ordered
Conversion installation: suitable installation plate has to be ordered
 Standard exchange: installation plate available

EN 834-conform one-sensor or two-sensor heat cost allocator, storing of annual values with checksum, electromechanical contact for detecting device opening (e.g. in the case of manipulation), programmable due date and seal already pre-mounted in the housing, for average temperatures ranges from 55 °C or 35 °C to 110 °C, prepared for the installation of a remote sensor, retrofitting can be done at any time on site.

Standard version:

Due date 31.12., battery warning off / opening detection in plain text / no summer switch-off - yet prepared, further parameter setting options are possible on request or can be activated directly on site / can be changed using software Q suite



Please note the instructions concerning approval of mixed operation.
Please contact us if you have any questions.

Communication: Radio



- **C-Mode** features see page 1
- switch from C- to S-Mode possible
- re-parameterisation from 2-sensor to 1-sensor device possible



Q AMR: features usable with a complete Q node 5.5 AMR network or with Q gateway 5.5 direct.

Q walk-by: requirement for readout: Q tool + Q app or Q log 5.5 + current version of ACT46

Radio transmission not compatible in C-Mode with Q caloric 5 for AMR installations

Product description	Group	Qty.	Part no.	Price (€)	
2-sensor measuring principle	K = 60, DD = 31.12.	5F	1	HCA50008B3C0 00000	61,55
2-sensor measuring principle + infrared	K = 60, DD = 31.12.	5F	1	HCA5000TB3C0 00000	68,61

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.



1 | Heat cost allocators



1.1 | Q caloric 5.5 (P2 + AL2)

Communication: Q opto (infrared-interface)



Metering technology compatible with Q caloric 5, 201S and 202S/K, mixed operation is permitted.

Product description		Group	Qty.	Part no.	Price (€)
1-sensor measuring principle	K = 26, DD = 31.12.	5E	1	HCA50005A1A0 00000	32,11
2-sensor measuring principle	K = 60, DD = 31.12.	5E	1	HCA50005B3C0 00000	33,88

Communication: Q basic (no interface)



Metering technology compatible with Q caloric 5, 201S and 202S/K, mixed operation is permitted.

Product description		Group	Qty.	Part no.	Price (€)
1-sensor measuring principle	K = 26, DD = 31.12.	5C	1	HCA50002A1A0 00000	25,05
2-sensor measuring principle	K = 60, DD = 31.12.	5C	1	HCA50002B3C0 00000	26,82

Further Q caloric parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

1 | Heat cost allocators



1.2 | Q caloric 5.5 (P3 + AL2)

The heat cost allocators listed below are for installation in new systems (no attachment parts available on the radiator), for standard exchange in systems with existing QUNDIS devices Q caloric 5, WHE2, WHE3 and WHE4 (attachment parts available on the radiator) and for conversion installation in systems with external brands e.g. evaporator (attachment parts partly available).

New installation: suitable installation plate has to be ordered

Conversion installation: suitable installation plate has to be ordered

Standard exchange: installation plate available

EN 834-conform one-sensor or two-sensor heat cost allocator, storing of annual values with checksum, electromechanical contact for detecting device opening (e.g. in the case of manipulation), programmable due date and seal already pre-mounted in the housing, for average temperatures ranges from 55 °C or 35 °C to 110 °C, prepared for the installation of a remote sensor, retrofitting can be done at any time on site.

Standard version:

Due date 31.12., battery warning off / opening detection in plain text / no summer switch-off - yet prepared, further parameter setting options are possible on request or can be activated directly on site / can be changed using software Q suite 5



Please note the instructions concerning approval of mixed operation.

Please contact us if you have any questions.

Communication: Radio



- **C-Mode** features see page 1
- switch from C- to S-Mode possible
- re-parameterisation from 2-sensor to 1-sensor device possible



Q AMR: features usable with a complete Q node 5.5 AMR network or with Q gateway 5.5 direct.

Q walk-by: requirement for readout: Q tool + Q app or Q log 5.5 + current version of ACT46

Radio transmission not compatible in C-Mode with Q caloric 5 for AMR installations

Product description	Group	Qty.	Part no.	Price (€)	
2-sensor measuring principle	K = 60, ST = 31.12.	5F	1	HCA50038B3C0 00000	61,55
2-sensor measuring principle + infrared	K = 60, ST = 31.12.	5F	1	HCA5003TB3C0 00000	68,61

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.



1 | Heat cost allocators



1.2 | Q caloric 5.5 (P3 + AL2)

Communication: Q opto (infrared-interface)



Metering technology compatible with Q caloric 5, mixed operation is permitted.

Product description	Group	Qty.	Part no.	Price (€)
1-sensor measuring principle K = 26, ST = 31.12.	5E	1	HCA50035A1A0 00000	32,11
2-sensor measuring principle K = 60, ST = 31.12.	5E	1	HCA50035B3C0 00000	33,88

Communication: Q basic (no interface)



Metering technology compatible with Q caloric 5, mixed operation is permitted.

Product description	Group	Qty.	Part no.	Price (€)
1-sensor measuring principle K = 26, ST = 31.12.	5C	1	HCA50032A1A0 00000	25,05
2-sensor measuring principle K = 60, ST = 31.12.	5C	1	HCA50032B3C0 00000	26,82

Further Q caloric parameterising variants available on request. See also article number matrix.

Other products for NEW INSTALLATION - STANDARD REPLACEMENT - REPAIR - CONVERSION (P3)

Further product variants for Q caloric 5.5 new installation or for systems with existing devices / attachment parts of the series **Q caloric 5 (P3), WHE3 and WHE4 with AL3 or AL4** can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in our customer portal.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

1 | Heat cost allocators



1.3 | Q caloric 5.5 - article number matrix

	Block1	Block2	Block3	Block4
Product family				
Heat Cost Allocator Q caloric 5.5	H C A 5	x x x x	x x x x	x x x x x
Logo				
QUNDIS (standard)	H C A 5	0 0 x x	x x x x	x x x x x
Housing version				
P2 (201/202 compatible)	H C A 5	x x 0 x	x x x x	x x x x x
P3 (WHE3 / WHE4 compatible)	H C A 5	x x 3 x	x x x x	x x x x x
Communication interface				
none	H C A 5	x x x 2	x x x x	x x x x x
infrared	H C A 5	x x x 5	x x x x	x x x x x
walk-by + AMR (S-Mode)	H C A 5	x x x 6	x x x x	x x x x x
walk-by + AMR (C-Mode)	H C A 5	x x x 8	x x x x	x x x x x
infrared + walk-by + AMR (S-Mode)	H C A 5	x x x N	x x x x	x x x x x
infrared + walk-by + AMR (C-Mode)	H C A 5	x x x T	x x x x	x x x x x
Measuring / calculation algorithm + Metering system				
AL2 - 1-sensor - prepared for summer switch-off (only basic + infrared)	H C A 5	x x x x	A x x x	x x x x x
AL2 - 2-sensor - prepared for summer switch-off	H C A 5	x x x x	B x x x	x x x x x
AL3 - 2-sensor - prepared for summer switch-off	H C A 5	x x x x	C x x x	x x x x x
AL4 - 2-sensor - prepared for summer switch-off	H C A 5	x x x x	D x x x	x x x x x
AL3/4 - 1-sensor - prepared for summer switch-off (only basic + infrared)	H C A 5	x x x x	E x x x	x x x x x
K-level				
none	H C A 5	x x x x	x 0 0 x	x x x x x
26 (standard for 1-sensor)	H C A 5	x x x x	x 1 A x	x x x x x
60 (standard for 2-sensor)	H C A 5	x x x x	x 3 C x	x x x x x
300	H C A 5	x x x x	x X 3 x	x x x x x
Approval				
EN 834	H C A 5	x x x x	x x x 0	x x x x x
France	H C A 5	x x x x	x x x 1	x x x x x
Denmark	H C A 5	x x x x	x x x 2	x x x x x
Russia	H C A 5	x x x x	x x x 3	x x x x x
Due date				
31.12. - standard	H C A 5	x x x x	x x x x	0 x x x x
Special options				
none (standard)	H C A 5	x x x x	x x x x	x 0 x x x
Summer month beginning				
none	H C A 5	x x x x	x x x x	x x 0 x x
Summer month end				
none	H C A 5	x x x x	x x x x	x x x 0 x
Special options				
none	H C A 5	x x x x	x x x x	x x x x 0
AES-encryption, Security Mode 5 according to EN 13757-7, Security Profile A according to OMS specification (only for C-Mode devices)	H C A 5	x x x 8	x x x x	x x x x V
- or -	H C A 5	x x x T	x x x x	x x x x V

Further options on request.

2 | Compact heat meters



Heat meters are devices which are mounted in a water cycle, can measure its heat output and save the data recorded. A distinction is made between heat meters and heat meters with cooling option. Heat meters record temperatures in the water circuit's supply and return flow as well as the volume flow rate, and assume a pure heat output of the pipe system (heating operation) for the consumption calculation. In contrast, heat meters with cooling option record both the heat output and the heat input of the pipe system (cooling operation). The data of both operating modes are managed in separate memories. All device types can display and/or store different values, e.g. the cumulated values at a selectable due date or end-of-the-month values and a fault message in case of an error.

Meters without integrated communication can be retrofitted with communication add-on modules an integrated into the Q AMR, Q walk-by or Q M-Bus system. Module variants can be found from chapter 6 onwards.



Image similar

2 | Compact heat meters - integrated radio interface



2.1 | Q heat 5.5 R - Screw-type meters (QDS)

The heat meters listed below have been designed for installation in systems where an installation section is available with the dimensions listed next to the meter, and the meter is screwed to the pipework system by means of two union nuts. All suitable meters are marked with "QDS".

MID-conform compact heat meter with a full-metal measurement unit and integrated infrared interface as well as **integrated radio interface** for integration in a Q walk-by or Q AMR system.

- Measuring cycle: 36 seconds (static)
- Switch of display unit (standard: kWh without decimal place)
- Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 10 years**
- Due day: 31.12.
- Measuring accuracy class: 3
- Q AMR or Q AMR extended telegrams optionally available
- AES-encryption optionally available



Image similar

SWITCH FROM C-TO S-MODE **NOT POSSIBLE**

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

C
MODE

Communication: Radio



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5I	1	HMR5000G0010 00210	354,01
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5I	1	HMR5000G1010 00210	354,01
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 1" x 130 mm	5I	1	HMR5000G2010 00210	365,62

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

2 | Compact heat meters



2.2 | Q heat 5.5 - Screw-type meters (QDS)

The heat meters listed below have been designed for installation in systems where an installation section is available with the dimensions listed next to the meter, and the meter is screwed to the pipework system by means of two union nuts. All suitable meters are marked with "QDS".

MID-conform compact heat meter with integrated infrared interface, inductive scanning process, current value as well as annual value and monthly values with checksum, detection of direction of rotation, programmable due date as well as display and storage of the maximum values, **prepared for installation of external communication modules for integration in a Q walk-by, Q AMR or Q M-Bus system (see chapter 6 onwards)**, retrofitting on site is possible at any time, Parameter setting via the operating keys or the software Q suite 5

- Measuring cycle: 36 seconds (static)
- Display unit: kWh
- Installation: Return flow
- **Battery: 10 years**



Image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q opto (infrared-interface)



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit cannot be removed	G 3/4" x 110 mm	5H	1	HMC500010010 00200	272,76
Calculator unit removable	G 3/4" x 110 mm	5I	1	HMR500010010 00200	307,59
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit cannot be removed	G 3/4" x 110 mm	5H	1	HMC500011010 00200	272,76
Calculator unit removable	G 3/4" x 110 mm	5I	1	HMR500011010 00200	307,59
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit cannot be removed	G 1" x 130 mm	5H	1	HMC500012010 00200	284,37
Calculator unit removable	G 1" x 130 mm	5I	1	HMR500012010 00200	319,19

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

2 | Compact heat meters - with integrated M-Bus



2.3 | Q heat 5.5 - Screw-type meters (QDS)

The heat meters listed below have been designed for installation in systems where an installation section is available with the dimensions listed next to the meter, and the meter is screwed to the pipework system by means of two union nuts.

MID-conform compact heat meter with integrated M-Bus and Impulse-IN interface

inductive scanning process, display of current and cumulative values, check number and many service and operating parameters, storage of the maximum values, **two additional impulse inputs** for the connection of up to two water meters with impulse output, Parameter setting via the operating keys or the software Q suite 5

- Measuring cycle: 36 seconds
- Display unit: kWh
- Installation: Return flow
- **Battery: 10 years**



Image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q M-Bus / Impuls-IN



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5S	1	HMR5000D0010 00200	342,41
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5S	1	HMR5000D1010 00200	342,41
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 1" x 130 mm	5S	1	HMR5000D2010 00200	354,01

Note: Article numbers refer to the English language version and 10-year battery.

Note: It is not possible to fit heat meters featuring integrated communication interfaces with external communication modules.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - with integrated M-Bus



2.3 | Q heat 5.5 - Screw-type meters (QDS)

The heat meters listed below have been designed for installation in systems where an installation section is available with the dimensions listed next to the meter, and the meter is screwed to the pipework system by means of two union nuts.

MID-conform compact heat meter with integrated M-Bus

inductive scanning process, display of current and cumulative values, check number and many service and operating parameters, storage of the maximum values, Parameter setting via the operating keys or the software Q suite 5

- Measuring cycle: 36 seconds
- Display unit: kWh
- Installation: Return flow
- **Battery: 10 years**



Image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q M-Bus



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5S	1	HMR5000C0010 00200	330,80
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5S	1	HMR5000C1010 00200	330,80
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 1" x 130 mm	5S	1	HMR5000C2010 00200	342,41

Note: Article numbers refer to the English language version and 10-year battery.

Note: It is not possible to fit heat meters featuring integrated communication interfaces with external communication modules.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - integrated radio interface



2.4 | Q heat 5.5 R - Measuring capsule ISTA-compatible (IST)

The heat meters listed below have been designed for installation in systems where an installation section is available with a ISTA-compatible single-pipe connection piece (EAT, EAS). All suitable meters are marked with "IST".

MID-conform compact heat meter with integrated infrared interface as well as **integrated radio interface** for integration in a Q walk-by or Q AMR system.

- Measuring cycle: 36 seconds (static)
- Switch of display unit (standard: kWh without decimal place)
- Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 10 years**
- Due day: 31.12.
- Measuring accuracy class: 3
- Q AMR or Q AMR extended telegrams optionally available
- AES-encryption optionally available



Image similar

SWITCH FROM C-TO S-MODE **NOT POSSIBLE**

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.



Communication: Radio



Product description	Group	Qty.	Part no.	Price (€)
Nominal flow 0.6 m³/h, Temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable G 2"	5L	1	HMR5000G4010 00210	365,62
Nominal flow 1.5 m³/h, Temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable G 2"	5L	1	HMR5000G5010 00210	365,62
Nominal flow 2.5 m³/h, Temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable G 2"	5L	1	HMR5000G6010 00210	377,23

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters



2.5 | Q heat 5.5 - Measuring capsule ISTA-compatible (IST)

The heat meters listed below have been designed for installation in systems where an installation section is available with a ISTA-compatible single-pipe connection piece (EAT, EAS). All suitable meters are marked with "IST".

MID-conform compact heat meter with integrated infrared interface, inductive scanning process, current value as well as annual value and monthly values with checksum, detection of direction of rotation, programmable due date as well as display and storage of the maximum values, prepared for installation of external communication modules for integration in a Q walk-by, Q AMR or Q M-Bus system (see chapter 6 onwards), retrofitting on site is possible at any time, Parameter setting via the operating keys or the software Q suite 5

- Measuring cycle: 36 seconds (static)
- Display unit: kWh
- Installation: Return flow
- **Battery: 10 years**



Image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q opto (infrared interface)



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 0.6 m³/h, Temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit cannot be removed	G 2"	5J	1	HMC500014010 00200	284,37
Calculator unit removable	G 2"	5L	1	HMR500014010 00200	319,19
Nominal flow 1.5 m³/h, Temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit cannot be removed	G 2"	5J	1	HMC500015010 00200	284,37
Calculator unit removable	G 2"	5L	1	HMR500015010 00200	319,19
Nominal flow 2.5 m³/h, Temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit cannot be removed	G 2"	5J	1	HMC500016010 00200	295,98
Calculator unit removable	G 2"	5L	1	HMR500016010 00200	330,80

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - integrated radio interface



2.6 | Q heat 5.5 R - Measuring capsule ALLMESS-compatible (AMS)

The heat meters listed below have been designed for installation in systems where an installation section is available with a ALLMESS-compatible single-pipe connection piece (EAT, EAS). All suitable meters are marked with "AMS".

MID-conform compact heat meter with integrated infrared interface as well as **integrated radio interface** for integration in a Q walk-by or Q AMR system.

- Measuring cycle: 36 seconds (static)
- Switch of display unit (standard: kWh without decimal place)
- Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 10 years**
- Due day: 31.12.
- Measuring accuracy class: 3
- Q AMR or Q AMR extended telegrams optionally available
- AES-encryption optionally available



SWITCH FROM C-TO S-MODE **NOT** POSSIBLE

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Radio



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 1.5 m³/h, Temp. sensor 6.0 x 60 mm 1.5 m sensor cable for direct or immersion sleeve measurement					
Calculator unit removable	M77 x 1,5	5K	1	HMR5000G8810 00210	371,42

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters



2.7 | Q heat 5 - Measuring capsule ALLMESS-compatible (AMS)

The heat meters listed below have been designed for installation in systems where an installation section is available with a ALLMESS-compatible single-pipe connection piece (EAT, EAS). All suitable meters are marked with "AMS".

MID-conform compact heat meter with integrated infrared interface, inductive scanning process, current value as well as annual value and monthly values with checksum, detection of direction of rotation, programmable due date as well as display and storage of the maximum values, prepared for installation of external communication modules for integration in a Q walk-by, Q AMR or Q M-Bus system (see chapter 6 onwards), retrofitting on site is possible at any time, Parameter setting via the operating keys or the software Q suite 5

- Measuring cycle: 36 seconds (static)
- Display unit: kWh
- Installation: Return flow
- **Battery: 6 years**



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q opto (infrared interface)



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 1.5 m³/h, Temp. sensor 6.0 x 60 mm 1.5 m sensor cable for direct or immersion sleeve measurement					
Calculator unit removable	M77 x 1,5	5L	1	HMR500018800 00000	319,19

Note: !!! All article numbers refer to the German language version and 6-year battery !!!
Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - integrated radio interface



2.8 | Q heat 5.5 R - Measuring capsule TECHEM-compatible (TEC)

The heat meters listed below have been designed for installation in systems where an installation section is available with a TECHEM-compatible single-pipe connection piece (EAT, EAS). All suitable meters are marked with "TEC".

MID-conform compact heat meter with integrated infrared interface as well as **integrated radio interface** for integration in a Q walk-by or Q AMR system.

- Measuring cycle: 36 seconds (static)
- Switch of display unit (standard: kWh without decimal place)
- Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 10 years**
- Due day: 31.12.
- Measuring accuracy class: 3
- Q AMR or Q AMR extended telegrams optionally available
- AES-encryption optionally available



Image similar

SWITCH FROM C-TO S-MODE **NOT POSSIBLE**

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.



Communication: Radio



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 1.5 m³/h, Temp. sensor 5.2 x 45 mm, 1.5 m sensor cable for direct or immersion sleeve measurement					
Calculator unit removable	M62 x 2	5K	1	HMR5000GB110 00210	371,42
Nominal flow 2.5 m³/h, Temp. sensor 5.2 x 45 mm, 1.5 m sensor cable for direct or immersion sleeve measurement					
Calculator unit removable	M62 x 2	5K	1	HMR5000GC110 00210	383,03

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters



2.9 | Q heat 5.5 - Measuring capsule TECHEM-compatible (TEC)

The heat meters listed below have been designed for installation in systems where an installation section is available with a TECHEM-compatible single-pipe connection piece (EAT, EAS). All suitable meters are marked with "TEC".

MID-conform compact heat meter with integrated infrared interface, inductive scanning process, current value as well as annual value and monthly values with checksum, detection of direction of rotation, programmable due date as well as display and storage of the maximum values, prepared for installation of external communication modules for integration in a Q walk-by, Q AMR or Q M-Bus system (see chapter 6 onwards), retrofitting on site is possible at any time, Parameter setting via the operating keys or the software Q suite 5

- Measuring cycle: 36 seconds (static)
- Display unit: kWh
- Installation: Return flow
- **Battery: 6 years**



Image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q opto (infrared interface)



Product description	Group	Qty.	Part no.	Price (€)
Nominal flow 1.5 m³/h, Temp. sensor 5.2 x 45 mm, 1.5 m sensor cable for direct or immersion sleeve measurement				
Calculator unit removable	M62 x 2	5K	1	HMR50001B100 00000 319,19
Nominal flow 2.5 m³/h, Temp. sensor 5.2 x 45 mm, 1.5 m sensor cable for direct or immersion sleeve measurement				
Calculator unit removable	M62 x 2	5K	1	HMR50001C100 00000 330,80

Note: !!! All article numbers refer to the German language version and 6-year battery !!!
Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - integrated radio interface



2.10 | Q heat 5.5 R US - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even "upside down" installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with "US".

MID-conform compact Ultrasonic heat meter with a full-metal measurement unit and integrated infrared interface as well as **integrated radio interface** for integration in a **Q walk-by** or **Q AMR system**.

- Heat meter and heat/cold meter available
- Measuring cycle: 12 seconds (static)
- Switch of display unit (standard: kWh without decimal place)
- Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 10 years**
- Due day: 31.12.
- Measuring accuracy class: 2 or 3 (depending on variant)
- Q AMR or Q AMR extended telegrams optionally available
- AES-encryption optionally available

SWITCH FROM C-TO S-MODE **NOT POSSIBLE**

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.



Image similar

HEAT METERS



Communication: Radio



Product description	Group	Qty.	Part no.	Price (€)
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 3 G 3/4" x 110 mm	5M	1	HMR500AG0080 00210	377,23
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 3 G 3/4" x 110 mm	5M	1	HMR500AG0180 00210	377,23
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 3/4" x 110 mm	5M	1	HMR500AG1085 00210	377,23
Calculator unit removable Cl. 3 G 1" x 130 mm	5M	1	HMR500AG3080 00210	388,83
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 3/4" x 110 mm	5M	1	HMR500AG1185 00210	377,23
Calculator unit removable Cl. 3 G 1" x 130 mm	5M	1	HMR500AG3180 00210	388,83
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 1" x 130 mm	5M	1	HMR500AG2085 00210	388,83
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 1" x 130 mm	5M	1	HMR500AG2185 00210	388,83

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat 5.5 R US parameterising variants available on request. See also article number matrix.

2 | Compact heat meters - integrated radio interface



2.10 | Q heat 5.5 R US - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even "upside down" installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with "US".

MID-conform compact Ultrasonic heat meter with a full-metal measurement unit and integrated infrared interface as well as **integrated radio interface** for integration in a **Q walk-by** or **Q AMR** system.

- Heat meter and heat/cold meter available
- Approved medium temperature up to 105°C (flow sensor up to 90°C)
- Measuring cycle: 12 seconds (static)
- Switch of display unit (standard: MWh with 3 decimal places)
- Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 10 years**
- Due day: 31.12.
- Measuring accuracy class: 2
- Q AMR or Q AMR extended telegrams optionally available
- AES-encryption optionally available



Image similar

SWITCH FROM C-TO S-MODE **NOT POSSIBLE**

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

HEAT METERS

C

MODE

Communication: Radio



Product description	Group	Qty.	Part no.	Price (€)		
Nominal flow 3,5 m³/h, temperature sensor 5,0 x 45 mm for direct or immersion sleeve measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	50	1	HBR500AG4085 00250	450,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	50	1	HBR500AG4A85 00250	450,22
Calculator unit removable	DN25	G 1 1/4" x 260 mm	50	1	HBR500AG5085 00250	464,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	50	1	HBR500AG5A85 00250	464,22
Nominal flow 3,5 m³/h, temperature sensor 5,2 x 45 mm for direct or immersion sleeve measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	50	1	HBR500AG4185 00250	450,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	50	1	HBR500AG4B85 00250	450,22
Calculator unit removable	DN25	G 1 1/4" x 260 mm	50	1	HBR500AG5185 00250	464,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	50	1	HBR500AG5B85 00250	464,22
Nominal flow 3,5 m³/h, temperature sensor AGFW 38 mm for direct measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	50	1	HBR500AG4G85 00250	467,63
Calculator unit removable	DN25	G 1 1/4" x 260 mm	50	1	HBR500AG5G85 00250	481,63
Nominal flow 3,5 m³/h, temperature sensor 6,0 x 60 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	50	1	HBR500AG4885 00250	450,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	50	1	HBR500AG5885 00250	464,22

2 | Compact heat meters - integrated radio interface



2.10 | Q heat 5.5 R US - Screw-type meters - Ultrasonic (US)

HEAT METERS



Communication: Radio

Product description	Group	Qty.	Part no.	Price (€)		
Nominal flow 6,0 m³/h, temperature sensor 5,0 x 45 mm for direct or immersion sleeve measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	5O	1	HBR500AG6085 00250	667,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	5O	1	HBR500AG6A85 00250	667,22
Calculator unit removable	DN25	G 1 1/4" x 260 mm	5O	1	HBR500AG7085 00250	699,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	5O	1	HBR500AG7A85 00250	699,22
Nominal flow 6,0 m³/h, temperature sensor 5,2 x 45 mm for direct or immersion sleeve measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	5O	1	HBR500AG6185 00250	667,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	5O	1	HBR500AG6B85 00250	667,22
Calculator unit removable	DN25	G 1 1/4" x 260 mm	5O	1	HBR500AG7185 00250	699,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	5O	1	HBR500AG7B85 00250	699,22
Nominal flow 6,0 m³/h, temperature sensor AGFW 38 mm for direct measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	5O	1	HBR500AG6G85 00250	684,63
Calculator unit removable	DN25	G 1 1/4" x 260 mm	5O	1	HBR500AG7G85 00250	716,63
Nominal flow 6,0 m³/h, temperature sensor 6,0 x 60 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	5O	1	HBR500AG6885 00250	667,22
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	5O	1	HBR500AG7885 00250	699,22
Nominal flow 10,0 m³/h, temperature sensor 5,0 x 45 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN40	G 2" x 200 mm	5O	1	HBR500AG8A85 00250	857,22
Calc. unit remov. TS symmetric*	DN40	G 2" x 300 mm	5O	1	HBR500AG9A85 00250	886,22
Nominal flow 10,0 m³/h, temperature sensor 5,2 x 45 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN40	G 2" x 200 mm	5O	1	HBR500AG8B85 00250	857,22
Calc. unit remov. TS symmetric*	DN40	G 2" x 300 mm	5O	1	HBR500AG9B85 00250	886,22
Nominal flow 10,0 m³/h, temperature sensor AGFW 38 mm for direct measurement						
Calculator unit removable	DN40	G 2" x 200 mm	5O	1	HBR500AG8G85 00250	874,63
Calculator unit removable	DN40	G 2" x 300 mm	5O	1	HBR500AG9G85 00250	903,63
Nominal flow 10,0 m³/h, temperature sensor 6,0 x 60 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN40	G 2" x 200 mm	5O	1	HBR500AG8885 00250	857,22
Calc. unit remov. TS symmetric*	DN40	G 2" x 300 mm	5O	1	HBR500AG9885 00250	886,22

*Supply flow and return flow temperature sensors are NOT integrated in the flow sensor and must be mounted separately.

2 | Compact heat meters - integrated radio interface



2.10 | Q heat 5.5 R US - Screw-type meters - Ultrasonic (US)

HEAT METERS WITH COOLING OPTION



Communication: Radio

Product description	Group	Qty.	Part no.	Price (€)
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 3 G 3/4" x 110 mm	5M	1	HMR500BG0080 00210	417,85
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 3 G 3/4" x 110 mm	5M	1	HMR500BG0180 00210	417,85
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 3/4" x 110 mm	5M	1	HMR500BG1085 00210	417,85
Calculator unit removable Cl. 3 G 1" x 130 mm	5M	1	HMR500BG3080 00210	429,46
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 3/4" x 110 mm	5M	1	HMR500BG1185 00210	417,85
Calculator unit removable Cl. 3 G 1" x 130 mm	5M	1	HMR500BG3180 00210	429,46
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 1" x 130 mm	5M	1	HMR500BG2085 00210	429,46
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable Cl. 2 G 1" x 130 mm	5M	1	HMR500BG2185 00210	429,46
Nominal flow 3,5 m³/h, temperature sensor 5,0 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable DN25 G 1 1/4" x 150 mm	5O	1	HBR500BG4085 00250	490,85
Calc. unit remov. TS symmetric* DN25 G 1 1/4" x 150 mm	5O	1	HBR500BG4A85 00250	490,85
Calculator unit removable DN25 G 1 1/4" x 260 mm	5O	1	HBR500BG5085 00250	504,85
Calc. unit remov. TS symmetric* DN25 G 1 1/4" x 260 mm	5O	1	HBR500BG5A85 00250	504,85
Nominal flow 3,5 m³/h, temperature sensor 5,2 x 45 mm for direct or immersion sleeve measurement				
Calculator unit removable DN25 G 1 1/4" x 150 mm	5O	1	HBR500BG4185 00250	490,85
Calc. unit remov. TS symmetric* DN25 G 1 1/4" x 150 mm	5O	1	HBR500BG4B85 00250	490,85
Calculator unit removable DN25 G 1 1/4" x 260 mm	5O	1	HBR500BG5185 00250	504,85
Calc. unit remov. TS symmetric* DN25 G 1 1/4" x 260 mm	5O	1	HBR500BG5B85 00250	504,85
Nominal flow 3,5 m³/h, temperature sensor AGFW 38 mm for direct measurement				
Calculator unit removable DN25 G 1 1/4" x 150 mm	5O	1	HBR500BG4G85 00250	508,26
Calculator unit removable DN25 G 1 1/4" x 260 mm	5O	1	HBR500BG5G85 00250	522,26
Nominal flow 3,5 m³/h, temperature sensor 6,0 x 60 mm for direct or immersion sleeve measurement				
Calc. unit remov. TS symmetric* DN25 G 1 1/4" x 150 mm	5O	1	HBR500BG4885 00250	490,85
Calc. unit remov. TS symmetric* DN25 G 1 1/4" x 260 mm	5O	1	HBR500BG5885 00250	504,85

2 | Compact heat meters - integrated radio interface



2.10 | Q heat 5.5 R US - Screw-type meters - Ultrasonic (US)

HEAT METERS WITH COOLING OPTION



Communication: Radio

Product description	Group	Qty.	Part no.	Price (€)		
Nominal flow 6,0 m³/h, temperature sensor 5,0 x 45 mm for direct or immersion sleeve measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	5O	1	HBR500BG6085 00250	707,85
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	5O	1	HBR500BG6A85 00250	707,85
Calculator unit removable	DN25	G 1 1/4" x 260 mm	5O	1	HBR500BG7085 00250	739,85
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	5O	1	HBR500BG7A85 00250	739,85
Nominal flow 6,0 m³/h, temperature sensor 5,2 x 45 mm for direct or immersion sleeve measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	5O	1	HBR500BG6185 00250	707,85
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	5O	1	HBR500BG6B85 00250	707,85
Calculator unit removable	DN25	G 1 1/4" x 260 mm	5O	1	HBR500BG7185 00250	739,85
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	5O	1	HBR500BG7B85 00250	739,85
Nominal flow 6,0 m³/h, temperature sensor AGFW 38 mm for direct measurement						
Calculator unit removable	DN25	G 1 1/4" x 150 mm	5O	1	HBR500BG6G85 00250	725,26
Calculator unit removable	DN25	G 1 1/4" x 260 mm	5O	1	HBR500BG7G85 00250	757,26
Nominal flow 6,0 m³/h, temperature sensor 6,0 x 60 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 150 mm	5O	1	HBR500BG6885 00250	707,85
Calc. unit remov. TS symmetric*	DN25	G 1 1/4" x 260 mm	5O	1	HBR500BG7885 00250	739,85
Nominal flow 10,0 m³/h, temperature sensor 5,0 x 45 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN40	G 2" x 200 mm	5O	1	HBR500BG8A85 00250	897,85
Calc. unit remov. TS symmetric*	DN40	G 2" x 300 mm	5O	1	HBR500BG9A85 00250	926,85
Nominal flow 10,0 m³/h, temperature sensor 5,2 x 45 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN40	G 2" x 200 mm	5O	1	HBR500BG8B85 00250	897,85
Calc. unit remov. TS symmetric*	DN40	G 2" x 300 mm	5O	1	HBR500BG9B85 00250	926,85
Nominal flow 10,0 m³/h, temperature sensor AGFW 38 mm for direct measurement						
Calculator unit removable	DN40	G 2" x 200 mm	5O	1	HBR500BG8G85 00250	915,26
Calculator unit removable	DN40	G 2" x 300 mm	5O	1	HBR500BG9G85 00250	944,26
Nominal flow 10,0 m³/h, temperature sensor 6,0 x 60 mm for direct or immersion sleeve measurement						
Calc. unit remov. TS symmetric*	DN40	G 2" x 200 mm	5O	1	HBR500BG8885 00250	897,85
Calc. unit remov. TS symmetric*	DN40	G 2" x 300 mm	5O	1	HBR500BG9885 00250	926,85

*Supply flow and return flow temperature sensors are NOT integrated in the flow sensor and must be mounted separately.

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat 5.5 R US parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters



2.11 | Q heat 5 - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even "upside down" installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with "US".

MID-conform compact Ultrasonic heat meter with integrated infrared interface, current value as well as annual value and monthly values with checksum, detection of direction of rotation, programmable due date as well as display and storage of the maximum values, prepared for installation of external communication modules for integration in a Q walk-by, Q AMR or Q M-Bus system (see chapter 6 onwards), retrofitting on site is possible at any time, Parameter setting via the operating keys or the software Q suite 5

- **Measuring cycle: 12 seconds**
- Display unit: kWh
- Installation: Return flow
- **Battery: 10 years**



Image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Communication: Q opto (infrared interface)



Product description	Group	Qty.	Part no.	Price (€)	
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMR500A11080 00200	330,80
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMR500A11180 00200	330,80
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 1" x 130 mm	5M	1	HMR500A12080 00200	342,41
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement					
Calculator unit removable	G 1" x 130 mm	5M	1	HMR500A12180 00200	342,41

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters



2.12 | Q heat - article number matrix

Product family	Block1	Block2	Block3	Block4	Basic Price
Heat Meter Q heat 5 / 5.5 - compact	H M C 5	x x x x	x x x x	x x x x x	266,96 €
Heat Meter Q heat 5 / 5.5 - removable (nominal flow ≤ 2,5)	H M R 5	x x x x	x x x x	x x x x x	301,78 €
Heat Meter Q heat 5.5 - removable (nominal flow ≥ 3,5)	H B R 5	x x x x	x x x x	x x x x x	301,78 €
Logo	Block1	Block2	Block3	Block4	Extra charge
QUNDIS (standard)	H x x 5	0 0 x x	x x x x	x x x x x	- €
Version	Block1	Block2	Block3	Block4	Extra charge
Heat metering impeller wheel (standard)	H M x 5	x x 0 x	x x x x	x x x x x	- €
+ cooling option	H M x 5	x x 1 x	x x x x	x x x x x	40,62 €
+ solar metering (not MID-compliant)	H M x 5	x x 2 x	x x x x	x x x x x	87,05 €
+ cooling option + solar metering (not MID-compliant)	H M x 5	x x 3 x	x x x x	x x x x x	127,68 €
Heat metering ultrasonic (only removable)	H x R 5	x x A x	x x x x	x x x x x	23,21 €
+ cooling option (only removable)	H x R 5	x x B x	x x x x	x x x x x	40,63 €
Communication interface	Block1	Block2	Block3	Block4	Extra charge
opto (infrared)	H M x 5	x x x 1	x x x x	x x x x x	- €
infrared + M-Bus + Impuls in (1 liters per pulse / filter off)	H M R 5	x x x 5	x x x x	x x x x x	34,82 €
infrared + M-Bus	H M R 5	x x x C	x x x x	x x x x x	23,21 €
infrared + M-Bus + Impuls in (10 liters per pulse / filter off)	H M R 5	x x x D	x x x x	x x x x x	34,82 €
infrared + AMR extended (C-Mode) - radio integrated	H x R 5	x x x E	x x x x	x x x x x	46,43 €
infrared + walk-by + AMR (C-Mode) - radio integrated	H x R 5	x x x G	x x x x	x x x x x	46,43 €
infrared + AMR (C-Mode) - radio integrated	H x R 5	x x x I	x x x x	x x x x x	46,43 €
Flow sensor	Block1	Block2	Block3	Block4	Extra charge
Screwed connection - 0.6 m³/h - 110 mm - return flow installation	H M x 5	x x x x	0 x x x	x x x x x	- €
Screwed connection - 1.5 m³/h - 110 mm - return flow installation	H M x 5	x x x x	1 x x x	x x x x x	- €
Screwed connection - 2.5 m³/h - 130 mm - return flow installation	H M x 5	x x x x	2 x x x	x x x x x	11,61 €
Screwed connection - 1.5 m³/h - 130 mm - return flow installation	H M R 5	x x x x	3 x x x	x x x x x	11,61 €
Screwed connection - 3,5 m³/h - 150 mm - return flow installation (only US)	H B R 5	x x x x	4 x x x	x x x x x	73,00 €
Screwed connection - 3,5 m³/h - 260 mm - return flow installation (only US)	H B R 5	x x x x	5 x x x	x x x x x	87,00 €
Screwed connection - 6,0 m³/h - 150 mm - return flow installation (only US)	H B R 5	x x x x	6 x x x	x x x x x	290,00 €
Screwed connection - 6,0 m³/h - 260 mm - return flow installation (only US)	H B R 5	x x x x	7 x x x	x x x x x	322,00 €
Screwed connection - 10,0 m³/h - 200 mm - return flow installation (only US)	H B R 5	x x x x	8 x x x	x x x x x	480,00 €
Screwed connection - 10,0 m³/h - 300 mm - return flow installation (only US)	H B R 5	x x x x	9 x x x	x x x x x	509,00 €
Capsule (IST) - 0.6 m³/h - G2 - return flow installation	H M x 5	x x x x	4 x x x	x x x x x	11,61 €
Capsule (IST) - 1.5 m³/h - G2 - return flow installation	H M x 5	x x x x	5 x x x	x x x x x	11,61 €
Capsule (IST) - 2.5 m³/h - G2 - return flow installation	H M x 5	x x x x	6 x x x	x x x x x	23,21 €
Capsule (AMS) - 1.5 m³/h - M77x1,5 - return flow installation (only removable)	H M R 5	x x x x	8 x x x	x x x x x	17,41 €
Capsule (TEC) - 1.5 m³/h - M62 x 2 - return flow install. (only removable)	H M R 5	x x x x	B x x x	x x x x x	17,41 €
Capsule (TEC) - 2.5 m³/h - M62 x 2 - return flow install. (only removable)	H M R 5	x x x x	C x x x	x x x x x	29,02 €
Screwed connection - 1.5 m³/h - 80 mm - return flow installation	H M x 5	x x x x	H x x x	x x x x x	- €
Screwed connection - 0.6 m³/h - 110 mm - supply flow installation	H M x 5	x x x x	J x x x	x x x x x	52,23 €
Screwed connection - 1.5 m³/h - 110 mm - supply flow installation	H M x 5	x x x x	K x x x	x x x x x	52,23 €
Screwed connection - 2.5 m³/h - 130 mm - supply flow installation	H M x 5	x x x x	L x x x	x x x x x	63,84 €
Screwed connection - 1.5 m³/h - 130 mm - supply flow installation	H M R 5	x x x x	Z x x x	x x x x x	63,84 €
Screwed connection - 3,5 m³/h - 150 mm - supply flow installation (only US)	H B R 5	x x x x	M x x x	x x x x x	125,23 €
Screwed connection - 3,5 m³/h - 260 mm - supply flow installation (only US)	H B R 5	x x x x	N x x x	x x x x x	139,23 €
Screwed connection - 6,0 m³/h - 150 mm - supply flow installation (only US)	H B R 5	x x x x	O x x x	x x x x x	342,23 €
Screwed connection - 6,0 m³/h - 260 mm - supply flow installation (only US)	H B R 5	x x x x	P x x x	x x x x x	374,23 €
Screwed connection - 10,0 m³/h - 200 mm - supply flow installation (only US)	H B R 5	x x x x	Q x x x	x x x x x	532,23 €
Screwed connection - 10,0 m³/h - 300 mm - supply flow installation (only US)	H B R 5	x x x x	R x x x	x x x x x	561,23 €

- Continued on next page -

2 | Compact heat meters



2.12 | Q heat - article number matrix

	Block1	Block2	Block3	Block4	Extra charge
Flow sensor					
Capsule (IST) - 0.6 m³/h - G2 - supply flow installation	H M x 5	x x x x	M x x x	x x x x x	63,84 €
Capsule (IST) - 1.5 m³/h - G2 - supply flow installation	H M x 5	x x x x	N x x x	x x x x x	63,84 €
Capsule (IST) - 2.5 m³/h - G2 - supply flow installation	H M x 5	x x x x	O x x x	x x x x x	75,45 €
Capsule (AMS) - 1.5 m³/h - M77x1,5 - supply flow installation (only removable)	H M R 5	x x x x	Q x x x	x x x x x	81,25 €
Capsule (TEC) - 1.5 m³/h - M62 x 2 - supply flow install. (only removable)	H M R 5	x x x x	T x x x	x x x x x	81,25 €
Capsule (TEC) - 2.5 m³/h - M62 x 2 - supply flow install. (only removable)	H M R 5	x x x x	U x x x	x x x x x	92,86 €
Screwed connection - 1.5 m³/h - 80 mm - supply flow installation	H M x 5	x x x x	Y x x x	x x x x x	52,23 €
Temperature sensor					
5,0 x 45 mm - 1,5 m	H x x 5	x x x x	x 0 x x	x x x x x	- €
5,2 x 45 mm - 1,5 m	H x x 5	x x x x	x 1 x x	x x x x x	- €
6,0 x 50 mm - 1,5 m	H M x 5	x x x x	x 2 x x	x x x x x	17,41 €
AGFW - 1,5 m	H M x 5	x x x x	x 3 x x	x x x x x	17,41 €
5,0 x 45 mm - 3,0 m	H x x 5	x x x x	x 4 x x	x x x x x	17,41 €
5,2 x 45 mm - 3,0 m	H x x 5	x x x x	x 5 x x	x x x x x	17,41 €
6,0 x 50 mm - 3,0 m	H M x 5	x x x x	x 6 x x	x x x x x	34,82 €
AGFW - 3,0 m	H M x 5	x x x x	x 7 x x	x x x x x	34,82 €
6,0 x 60 mm - 1,5 m symmetric (only AMS capsule and only US ≥ Qp.3.5)	H x R 5	x x x x	x 8 x x	x x x x x	- €
6,0 x 60 mm - 3,0 m symmetric (only AMS capsule and only US ≥ Qp.3.5)	H x R 5	x x x x	x 9 x x	x x x x x	17,41 €
5,0 x 45 mm - 1,5 m symmetric (only US ≥ Qp.3.5)	H B R 5	x x x x	x A x x	x x x x x	- €
5,2 x 45 mm - 1,5 m symmetric (only US ≥ Qp.3.5)	H B R 5	x x x x	x B x x	x x x x x	- €
5,0 x 45 mm - 3,0 m symmetric (only US ≥ Qp.3.5)	H B R 5	x x x x	x C x x	x x x x x	17,41 €
5,2 x 45 mm - 3,0 m symmetric (only US ≥ Qp.3.5)	H B R 5	x x x x	x D x x	x x x x x	17,41 €
AGFW 38 mm - 1,5 m (only US ≥ Qp.3.5)	H B R 5	x x x x	x G x x	x x x x x	17,41 €
AGFW 38 mm - 3,0 m (only US ≥ Qp.3.5)	H B R 5	x x x x	x H x x	x x x x x	34,82 €
Power supply + measuring cycle					
Battery 6 years - 36 seconds	H M x 5	x x x x	x x 0 x	x x x x x	- €
Battery 10 years - 36 seconds	H M x 5	x x x x	x x 1 x	x x x x x	5,80 €
Battery 7 years - 8 seconds (only Q heat 5.5 R)	H M x 5	x x x x	x x 2 x	x x x x x	5,80 €
Battery 6 years - 6 seconds	H M x 5	x x x x	x x 4 x	x x x x x	5,80 €
Battery 10 years - 12 seconds (only US)	H x R 5	x x x x	x x 8 x	x x x x x	5,80 €
Battery 6 years - 4 seconds (7 years Q heat 5.5 US R)	H x R 5	x x x x	x x 9 x	x x x x x	- €
Approval + medium					
Heat MID/Class 3, without cold, water	H M x 5	x x x x	x x x 0	x x x x x	- €
Heat MID/Class 2, without cold, water	H x R 5	x x x x	x x x 5	x x x x x	- €
without - (heating) water + Glythermin P44 (only impeller wheel)	H M x 5	x x x x	x x x A	x x x x x	- €
without - (heating) water + Tyfocor L (only impeller wheel)	H M x 5	x x x x	x x x B	x x x x x	- €
without - (heating) water + Tyfocor N (only impeller wheel)	H M x 5	x x x x	x x x C	x x x x x	- €
without - (heating) water + Antifrogen L (only impeller wheel)	H M x 5	x x x x	x x x D	x x x x x	- €
without - (heating) water + Antifrogen N (only impeller wheel)	H M x 5	x x x x	x x x E	x x x x x	- €
without - (heating) water + Dowcal 20 (only impeller wheel)	H M x 5	x x x x	x x x F	x x x x x	- €
without - (heating) water + Gelbin DC 924 L (only impeller wheel)	H M x 5	x x x x	x x x G	x x x x x	- €
without - (heating) water + Tyfocor LS (only impeller wheel)	H M x 5	x x x x	x x x H	x x x x x	- €
without - (heating) water + Solarliquid L (only impeller wheel)	H M x 5	x x x x	x x x L	x x x x x	- €

- Continued on next page -

2 | Compact heat meters



2.12 | Q heat - article number matrix

Due date	Block1	Block2	Block3	Block4	Extra charge
31.12. (standard)	H x x 5	x x x x	x x x x	0 x x x x	- €
Temperature switch-on threshold:	Block1	Block2	Block3	Block4	Extra charge
0,2 / 0,2 K (standard)	H x x 5	x x x x	x x x x	x 0 x x x	- €
Labeling and documentation	Block1	Block2	Block3	Block4	Extra charge
German (standard)	H x x 5	x x x x	x x x x	x x 0 x x	- €
English	H x x 5	x x x x	x x x x	x x 2 x x	- €
Italian	H x x 5	x x x x	x x x x	x x 3 x x	- €
French	H x x 5	x x x x	x x x x	x x 4 x x	- €
Spanish	H x x 5	x x x x	x x x x	x x 5 x x	- €
Lithuanian	H x x 5	x x x x	x x x x	x x 7 x x	- €
Czech	H x x 5	x x x x	x x x x	x x 8 x x	- €
Polish	H x x 5	x x x x	x x x x	x x 9 x x	- €
Slovenian	H x x 5	x x x x	x x x x	x x A x x	- €
Russian	H x x 5	x x x x	x x x x	x x R x x	- €
Turkish	H x x 5	x x x x	x x x x	x x T x x	- €
Display	Block1	Block2	Block3	Block4	Extra charge
kWh (decimal places: 1)	H M x 5	x x x x	x x x x	x x x 0 x	- €
kWh (decimal places: 0)	H x x 5	x x x x	x x x x	x x x 1 x	- €
GJ (decimal places: 4)	H M x 5	x x x x	x x x x	x x x 4 x	- €
MWh (decimal places: 3)	H x x 5	x x x x	x x x x	x x x 5 x	- €
GJ (decimal places: 3)	H x x 5	x x x x	x x x x	x x x 7 x	- €
Special options	Block1	Block2	Block3	Block4	Extra charge
none	H x x 5	x x x x	x x x x	x x x x 0	- €
AES-encryption according to OMS-Encryption Mode 5 (only for C-Mode devices)	H x x 5	x x x x	x x x x	x x x x V	- €
AES-encryption according to OMS-Encryption Mode 7 (only for C-Mode devices AMR and AMR ext.)	H x x 5	x x x x	x x x x	x x x x W	- €

2 | Compact heat meters



2.13 | Q heat 5.5 US - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even “upside down” installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with “US”.

MID-conform compact Ultrasonic heat meter with a **full-metal measurement unit** and **integrated infrared interface**, current value as well as annual value and monthly values with checksum, programmable due date as well as display and storage of the maximum values, Parameter setting via the operating key or the software Q suite for Q heat 5.5 US

- Heat meter and heat/cold meter available
- Measuring accuracy: class 2
- Measuring cycle: adaptive
- Display unit: kWh
- Installation: Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 11 years**
- Due day: 31.12.



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Heat Meters

Communication: Q opto (infrared interface)



Product description	Group	Qty.	Part no.	Price(€)
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HMRH00A100B5 01200	327,32
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HMRH00A101B5 01200	327,32
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HMRH00A110B5 01200	327,32
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HMRH00A111B5 01200	327,32
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 1" x 130 mm	5M	1	HMRH00A120B5 01200	338,92
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 1" x 130 mm	5M	1	HMRH00A121B5 01200	338,92

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cold meters are available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters



2.14 | Q heat 5.5 US comp. - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even “upside down” installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with “US”.

MID-conform compact Ultrasonic heat meter with a **glass-fiber reinforced measurement unit** and **integrated infrared interface**, current value as well as annual value and monthly values with checksum, programmable due date as well as display and storage of the maximum values, Parameter setting via the operating key or the software Q suite for Q heat 5.5 US

- Heat meter and heat-/cold meter available
- Measuring accuracy: class 2
- Measuring cycle: adaptive
- Display unit: kWh
- Installation: Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 11 years**
- Due day: 31.12.



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Heat meters

Communication: Q opto (infrared interface)



Product description	Group	Qty.	Part no.	Price(€)
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HCRH00A100B5 01200	304,10
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HCRH00A101B5 01200	304,10
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HCRH00A110B5 01200	304,10
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 3/4" x 110 mm	5M	1	HCRH00A111B5 01200	304,10
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 1" x 130 mm	5M	1	HCRH00A120B5 01200	315,71
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*				
Calculator unit removable G 1" x 130 mm	5M	1	HCRH00A121B5 01200	315,71

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cold meters are available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - Impulse-Out | M-Bus



2.15 | Q heat 5.5 US - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even "upside down" installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with "US".

MID-conform compact Ultrasonic heat meter with a full-metal measurement unit and integrated infrared interface as well as a **integrated Impuls-Out or M-Bus-interface**, current value as well as annual value and monthly values with checksum, programmable due date as well as display and storage of the maximum values, Parameter setting via the operating key or the software Q suite for Q heat 5.5 US

- Heat meter and heat-/cold meter available
- Measuring accuracy: class 2
- Measuring cycle: adaptive
- Display unit: kWh
- Installation: Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 11 years**
- Due day: 31.12.



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Heat Meters

Communication: Impuls-out



Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AB00B5 01200	350,53
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AB01B5 01200	350,53
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AB10B5 01200	350,53
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AB11B5 01200	350,53
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HMRH00AB20B5 01200	362,14
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HMRH00AB21B5 01200	362,14

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cold meters are available on request. See also article number matrix.

2 | Compact heat meters - Impulse-Out | M-Bus



2.15 | Q heat 5.5 US - Screw-type meters - Ultrasonic (US)

Communication: M-Bus



Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AC00B5 01200	350,53
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AC01B5 01200	350,53
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AC10B5 01200	350,53
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HMRH00AC11B5 01200	350,53
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HMRH00AC20B5 01200	362,14
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HMRH00AC21B5 01200	362,14

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cooling meters are available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - Impulse-Out | M-Bus



2.16 | Q heat 5.5 US comp. - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even "upside down" installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with "US".

MID-conform compact Ultrasonic heat meter with a glass-fiber reinforced measurement unit and integrated infrared interface as well as a **integrated Impuls-Out or M-Bus-interface**, acurrent value as well as annual value and monthly values with checksum, programmable due date as well as display and storage of the maximum values, Parameter setting via the operating key or the software Q suite for Q heat 5.5 US

- Heat meter and heat-/cold meter available
- Measuring accuracy: class 2
- Measuring cycle: adaptive
- Display unit: kWh
- Installation: Supply flow and return flow of the device on site programmable (standard: return flow)
- **Battery: 11 years**
- Due day: 31.12.



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Heat Meters

Communication: Impuls-out



Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AB00B5 01200	327,32
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AB01B5 01200	327,32
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AB10B5 01200	327,32
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AB11B5 01200	327,32
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00AB20B5 01200	338,92
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00AB21B5 01200	338,92

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cold meters are available on request. See also article number matrix.

2 | Compact heat meters - Impulse-Out | M-Bus



2.16 | Q heat 5.5 US comp. - Screw-type meters - Ultrasonic (US)

Heat Meters

Communication: M-Bus



Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AC00B5 01200	327,32
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AC01B5 01200	327,32
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AC10B5 01200	327,32
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AC11B5 01200	327,32
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00AC20B5 01200	338,92
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00AC21B5 01200	338,92

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cold meters are available on request. See also article number matrix.

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

2 | Compact heat meters - integrated radio interface



2.17 | Q heat 5.5 US comp. - Screw-type meters - Ultrasonic (US)

Ultrasonic heat meters are used wherever especially precise measurements with long-term stability are required. The patented and innovative measuring process guarantees measuring accuracy over the whole product service life. The extremely small installation height allows it to be used in very narrow space. There is a free choice of installation position for the metering device, and even "upside down" installation is possible, allowing flexible adaptation to the installation conditions found on site. The device has a detachable calculator unit as a standard feature. All suitable Ultrasonic meters are marked with "US".

MID-conform compact Ultrasonic heat meter with a glass-fiber reinforced measurement unit and integrated infrared interface as well as integrated radio interface for walk-by readouts (Q tool + Q app or Q log 5.5 + ACT46) or for remote readout via Q gateway 5.5 direct.

Parameter setting via the operating key or the software Q suite for Q heat 5.5 US.

- Heat meter and cold meter* as well as heat-/cold meter available
- Measuring accuracy: class 2
- Measuring cycle: adaptive
- Display unit: kWh
- Installation: Supply flow and return flow of the device on site programmable (standard: return flow)
- Battery: 11 years
- Due day: 31.12.
- Data telegramm includes current consumption values and 13 statistics



* only national approval for Germany and Austria

SWITCH FROM C- TO S-MODE NOT POSSIBLE

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

HEAT METERS



Communication: Radio



Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AU00B5 01200	350,53
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AU01B5 01200	350,53
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AU10B5 01200	350,53
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00AU11B5 01200	350,53
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00AU20B5 01200	362,14
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00AU21B5 01200	362,14

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

2 | Compact heat meters - integrated radio interface



2.17 | Q heat 5.5 US comp. - Screw-type meters - Ultrasonic (US)

COLD METERS

Communication: Radio



Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00CU00B6 01200	396,96
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00CU10B6 01200	396,96
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00CU11B6 01200	396,96
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00CU20B6 01200	408,57
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00CU21B6 01200	408,57

HEAT METERS WITH COOLING OPTION

Communication: Radio Q AMR



Please note:

- The readout of heat meters with cooling option is only via Q gateway 5.5 direct possible.
- Data telegram contains only current consumption values

Product description	Group	Qty.	Part no.	Price(€)	
Nominal flow 0.6 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00BU00B5 01200	391,16
Nominal flow 0.6 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00BU01B5 01200	391,16
Nominal flow 1.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00BU10B5 01200	391,16
Nominal flow 1.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 3/4" x 110 mm	5M	1	HCRH00BU11B5 01200	391,16
Nominal flow 2.5 m³/h, temperature sensor 5.0 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00BU20B5 01200	402,76
Nominal flow 2.5 m³/h, temperature sensor 5.2 x 45 mm for direct or immersion sleeve measurement*					
Calculator unit removable	G 1" x 130 mm	5M	1	HCRH00BU21B5 01200	402,76

* Accessories required for immersion sleeve measurement.

Note: Article numbers refer to the English language version and 11-year battery.

Further Q heat 5.5 US parameterising variants as well as cold meters are available on request. See also article number matrix.

3 | Split heat meters

Heat meters are devices which are mounted in a water cycle, can measure its heat output and save the data recorded. A distinction is made between heat meters and heat meters with cooling option. Heat meters record temperatures in the water circuit's supply and return flow as well as the volume flow rate, and assume a pure heat output of the pipe system (heating operation) for the consumption calculation. In contrast, heat meters with cooling option record both the heat output and the heat input of the pipe system (cooling operation). The data of both operating modes are managed in separate memories. Both device types can display and/or store different values, e.g. the cumulated values at a selectable due date or end-of-the-month values and a fault message in case of an error. Both device types are optionally available with an integrated M-Bus module. In addition, all the meters featured in this chapter can be retrofitted with external communication modules on site and can thus be integrated in the Q AMR, Q walk-by or Q M-Bus system. You can find the external module variants from chapter 6 onwards.



3 | Split heat meters



The heat meters listed below have been designed for installation in systems where there is an installation section available with the dimensions listed next to the meter.

3.1 Ultrasonic flow sensors (thread)



MID-compliant split heat meter G 03 consisting of:
calculator unit with optical interface for programming / readout and for retrofitting of external communication modules, **MID-compliant pair of temperature sensors PT 1000** - for dimensions see below with 3 m cable, **direct measurement up to nominal flow of 6.0 m³/h**, ultrasonic flow sensor with thread connections and a dynamic ratio of 1:100 **for any required installation position, up to and including a nominal flow of 10.0 m³/h with 5.6 mm sensor bore hole**, operating pressure PN16 bar, **approved medium temperature 130° C up to Qp 2.5 and 150° C from Qp 3.5**, display of annual value with check number, programmable scheduled date, parameterisation possible via operating key and adapter



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Product description	Group	Qty.	Part no.	Price (€)		
G 03 – nominal flow rate 0.6 m³/h, temperature sensor 5.2 x 45 mm						
Standard	DN15	G 3/4" x 110 mm	C5	1	G03500600 M 4003	432,67
alternative flow sensor	DN20	G 1" x 130 mm	C5	1	G03500600 M 4003 with 50595000H 4	438,82
alternative flow sensor	DN20	G 1" x 190 mm	C5	1	G03500600 M 4003 with 50595001H 4	449,04
G 03 – nominal flow rate 1.5 m³/h, temperature sensor 5.2 x 45 mm						
Standard	DN15	G 3/4" x 110 mm	C5	1	G03501500 M 4003	432,67
alternative flow sensor	DN20	G 1" x 130 mm	C5	1	G03501500 M 4003 with 50595002H 4	449,04
alternative flow sensor	DN20	G 1" x 190 mm	C5	1	G03501500 M 4003 with 50595003H 4	456,58
G 03 – nominal flow rate 2.5 m³/h, temperature sensor 5.2 x 45 mm						
Standard	DN20	G 1" x 130 mm	C5	1	G03502500 M 4003	442,88
alternative flow sensor	DN20	G 1" x 190 mm	C5	1	G03502500 M 4003 with 50595004H 4	500,69
G 03 – nominal flow rate 3.5 m³/h, temperature sensor 6.0 x 60 mm universal (for existing installations)						
Standard	DN25	G 5/4" x 260 mm	C5	1	G03503501 M 4003	631,39
alternative	DN25	G 5/4" x 135 mm	C5	1	G03503501 M 4003 with 50595005H 4	701,61
alternative	DN25	G 5/4" x 150 mm	C5	1	G03503501 M 4003 with 50595006H 4	701,61
alternative	DN32	G 1½" x 150 mm	C5	1	G03503501 M 4003 with 50595019H 4	701,61
alternative	DN32	G 1½" x 260 mm	C5	1	G03503501 M 4003 with 50595018H 4	631,39
G 03 – nominal flow rate 3.5 m³/h, temperature sensor 5.2 x 45 mm (for new installations)						
Standard	DN25	G 5/4" x 260 mm	C5	1	G03503500 M 4003	631,38
alternative flow sensor	DN25	G 5/4" x 135 mm	C5	1	G03503500 M 4003 with 50595005H 4	701,60
alternative flow sensor	DN25	G 5/4" x 150 mm	C5	1	G03503500 M 4003 with 50595006H 4	701,60
alternative flow sensor	DN32	G 1½" x 150 mm	C5	1	G03503500 M 4003 with 50595019H 4	701,60
alternative flow sensor	DN32	G 1½" x 260 mm	C5	1	G03503500 M 4003 with 50595018H 4	631,38
G 03 – nominal flow rate 6.0 m³/h, temperature sensor 6.0 x 60 mm universal (for existing installations)						
Standard	DN25	G 5/4" x 260 mm	C5	1	G03506001 M 4003	631,39
alternative flow sensor	DN25	G 5/4" x 135 mm	C5	1	G03506001 M 4003 with 50595007H 4	701,61
alternative flow sensor	DN25	G 5/4" x 150 mm	C5	1	G03506001 M 4003 with 50595008H 4	701,61
alternative flow sensor	DN32	G 1½" x 150 mm	C5	1	G03506001 M 4003 with 50595014H 4	753,84
alternative flow sensor	DN32	G 1½" x 260 mm	C5	1	G03506001 M 4003 with 50595015H 4	753,84
alternative flow sensor	DN40	G 2" x 150 mm	C5	1	G03506001 M 4003 with 50595017H 4	799,17
G 03 – nominal flow rate 6.0 m³/h, temperature sensor 5.2 x 45 mm (for new installations)						
Standard	DN25	G 5/4" x 260 mm	C5	1	G03506000 M 4003	631,38
alternative flow sensor	DN25	G 5/4" x 135 mm	C5	1	G03506000 M 4003 with 50595007H 4	701,60
alternative flow sensor	DN25	G 5/4" x 150 mm	C5	1	G03506000 M 4003 with 50595008H 4	701,60
alternative flow sensor	DN32	G 1½" x 150 mm	C5	1	G03506000 M 4003 with 50595014H 4	753,84
alternative flow sensor	DN32	G 1½" x 260 mm	C5	1	G03506000 M 4003 with 50595015H 4	753,84
alternative flow sensor	DN40	G 2" x 150 mm	C5	1	G03506000 M 4003 with 50595017H 4	799,16
G 03 – nominal flow rate 10.0 m³/h, temperature sensor 6.0 x 60 mm universal						
Standard	DN40	G 2" x 300 mm	C5	1	G03510001 M 4003	799,14
alternative flow sensor	DN40	G 2" x 200 mm	C5	1	G03510001 M 4003 with 50595009H 4	867,94

Note: Article numbers refer to the English language version and 10-year battery. Further Q heat parameterising variants available on request. See also article number matrix.

3.2 | Ultrasonic flow sensors (flange)

MID-compliant split heat meter G 04 consisting of: calculator unit with optical interface for programming / readout and for retrofitting of external communication modules, **MID-compliant pair of temperature sensors PT 1000** - for dimensions see below with 3 m cable, **direct measurement up to nominal flow of 6.0 m³/h**, ultrasonic flow sensor with flange connections and a dynamic ratio of 1:100 for any required installation position, **up to and including a nominal flow of 10.0 m³/h with 5.6 mm sensor bore hole**, operating pressure PN25 bar, approved medium temperature 150°C, display of annual value with check number, programmable scheduled date, parameterisation possible via operating key and adapter



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Product description	Group	Qty.	Part no.	Price (€)
G 04 – nominal flow rate 3.5 m³/h, temperature sensor 6.0 x 60 mm universal (for existing installations)				
DN 25 x 260 mm	C5	1	G04503501 M 4003	814,08
G 04 – nominal flow rate 3.5 m³/h, temperature sensor 5.2 x 45 mm (for new installations)				
DN 25 x 260 mm	C5	1	G04503500 M 4003	814,08
G 04 – nominal flow rate 6.0 m³/h, temperature sensor 6.0 x 60 mm universal (for existing installations)				
DN 25 x 260 mm	C5	1	G04506001 M 4003	814,08
alternative flow sensor		1	G04506001 M 4003 with 50595016H 4	843,33
G 04 – nominal flow rate 6.0 m³/h, temperature sensor 5.2 x 45 mm (for new installations)				
DN 25 x 260 mm	C5	1	G04506000 M 4003	814,08
alternative flow sensor		1	G04506000 M 4003 with 50595016H 4	843,33
G 04 – nominal flow rate 10.0 m³/h, temperature sensor 6.0 x 60 mm universal				
DN 40 x 300 mm	C5	1	G04510001 M 4003	989,85
G 04 – nominal flow rate 15.0 m³/h, temperature sensor 6.0 x 60 mm universal				
DN 50 x 270 mm	C5	1	G04515002 M 4003	1.391,68
G 04 – nominal flow rate 25.0 m³/h, temperature sensor 6.0 x 60 mm universal				
DN 65 x 300 mm	C5	1	G04525002 M 4003	1.568,22
G 04 – nominal flow rate 40.0 m³/h, temperature sensor 6.0 x 60 mm universal				
DN 80 x 300 mm	C5	1	G04540002 M 4003	1.838,43
G 04 – nominal flow rate 60.0 m³/h, temperature sensor 6.0 x 60 mm universal				
DN 100 x 360 mm	C5	1	G04540002 M 4003 with 50595013H 5	2.092,94

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

3 | Split heat meters



3.3 | Woltman flow sensors (flange)



MID-compliant split heat meter G 04 consisting of: calculator unit with optical interface for programming / readout and for retrofitting of external communication modules, Woltman flow sensor with flange connections **for the indicated installation position**, display of annual value with check number, programmable scheduled date, **approved medium temperature 105° C**, parameterisation possible via operating key and adapter

- mounting: return flow
- battery life: 10 years
- MID-compliant pair of temperature sensors:
PT 1000 with 6.0 x 60 mm (universal) and 3 m cable



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Product description	Group	Qty.	Part no.	Price (€)
G 04 – nominal flow rate 15.0 m³/h for horizontal installation				
4-hole DN 50 x 270 mm	C5	1	G04015002 M 1003	1.155,24
G 04 – nominal flow rate 25.0 m³/h for horizontal installation				
4-hole DN 65 x 300 mm	C5	1	G04025002 M 1003	1.192,62
G 04 – nominal flow rate 40.0 m³/h for horizontal installation				
8-hole DN 80 x 300 mm	C5	1	G04040002 M 1003	1.321,45
G 04 – nominal flow rate 60.0 m³/h for horizontal installation				
8-hole DN 100 x 360 mm	C5	1	G04060002 M 1003	1.736,64
G 04 – nominal flow rate 150.0 m³/h for horizontal installation				
8-hole DN 150 x 500 mm	C5	1	G04315002 M 1003	2.823,52
G 04 – nominal flow rate 15.0 m³/h for horizontal / vertical installation				
4-hole DN 50 x 200 mm	C5	1	G04215002 M 1003	1.155,24
G 04 – nominal flow rate 25.0 m³/h for horizontal / vertical installation				
4-hole DN 65 x 200 mm	C5	1	G04225002 M 1003	1.192,62
G 04 – nominal flow rate 32.0 m³/h for horizontal / vertical installation				
8-hole DN 80 x 225 mm	C5	1	G04240002 M 1003	1.321,45
G 04 – nominal flow rate 50.0 m³/h for horizontal / vertical installation				
8-hole DN 100 x 250 mm	C5	1	G04260002 M 1003	1.736,64
G 04 – nominal flow rate 80.0 m³/h for horizontal / vertical installation				
8-hole DN 125 x 250 mm	C5	1	G04310002 M 1003	2.174,80
G 04 – nominal flow rate 200.0 m³/h for horizontal / vertical installation				
8-hole DN 150 x 300 mm	C5	1	G04315002 M 1003	2.823,52
G 04 – nominal flow rate 200.0 m³/h for horizontal / vertical installation				
12-hole DN 200 x 350 mm	C5	1	G04315002 M 1003	3.442,17

Note: Article numbers refer to the English language version and 10-year battery.

Further Q heat parameterising variants available on request. See also article number matrix.

3 | Split heat meters



3.4 | Calculator units



MID-conform calculator unit

opt. interface for programming / readout as well as retrofitting of external communication modules, for the connection of the given temperature sensors either using 2 or 4-conductor technology as well as flow sensors with its specified pulse values, display of the annual value with checksum, programmable due date, display unit MWh, Parameter setting via the operating key and adapter possible

Suitable for the connection of any required flow sensors with impulse output.

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.



Calculator units R 20 with 10-year battery, display unit MWh

without additional power supply via the calculator unit

Product description			Group	Qty.	Part no.	Price (€)
Heat meter	PT 500	2.5 l/Imp.	C4	1	R20443000 M 0030	251,52
Heat meter	PT 500	10.0 l/Imp.	C4	1	R20463000 M 0030	251,52
Heat meter	PT 500	25.0 l/Imp.	C4	1	R20473000 M 0030	251,52
Heat meter	PT 500	100.0 l/Imp.	C4	1	R20492000 M 0030	251,52
Heat meter	PT 1000	1.0 l/Imp.	C4	1	R20533000 M 0030	251,52
Heat meter	PT 1000	10.0 l/Imp.	C4	1	R20563000 M 0030	251,52
Heat meter	PT 1000	100.0 l/Imp.	C4	1	R20592000 M 0030	251,52

Calculator units R 21 with 10-year battery, display unit MWh

without additional power supply via the calculator unit

Product description			Group	Qty.	Part no.	Price (€)
Heat meter with cooling option	PT 500	10.0 l/Imp.	C4	1	R21463000 M 0030	292,84
Heat meter with cooling option	PT 500	100.0 l/Imp.	C4	1	R21492000 M 0030	292,84
Heat meter with cooling option	PT 1000	10.0 l/Imp.	C4	1	R21563000 M 0030	292,84
Heat meter with cooling option	PT 1000	100.0 l/Imp.	C4	1	R21592000 M 0030	292,84

Calculator units R 28 with 10-year battery, display unit MWh

without additional power supply via the calculator unit

Product description			Group	Qty.	Part no.	Price (€)
Solar heat meter - Medium: Dowcal 20	PT 1000	1.0 l/Imp.	C4	1	R28533008 E 0030	374,56
Solar heat meter - Medium: Antifrogen N	PT 1000	10.0 l/Imp.	C4	1	R28562007 E 0030	374,56
Solar heat meter - Medium: Tyfocor L	PT 1000	100.0 l/Imp.	C4	1	R28592004 E 0030	374,56

Note: Article numbers refer to the English language version and 10-year battery.

Other split calculator variants are available on request:

- Adaptations for glycol additives
- Heat meters with cooling option
- For temperature sensor connection PT100 or PT500
- Devices with 6-year battery
- Display of decimal places
- Volume measurement in the supply flow (hot pipe)
- Display unit kWh, MJ, kJ
- Marking languages: German, English, Italian, Spanisch, Lithuanian

3 | Split heat meters



3.4 | Calculator units



Calculator units R 20 with 10-year battery + 2nd battery, display unit MWh

with additional power supply via the calculator unit (standard for QUNDIS split heat meters with ultrasonic flow sensors)

Product description	Group	Qty.	Part no.	Price (€)
Heat meter PT 1000 0.1 l/Imp.	C4	1	R20F03000 M 0030	311,65
Heat meter PT 1000 1.0 l/Imp.	C4	1	R20F33000 M 0030	311,65
Heat meter PT 1000 10.0 l/Imp.	C4	1	R20F63000 M 0030	311,65
Heat meter PT 1000 10.0 l/Imp.	C4	1	R20F62000 M 0030	311,65
Heat meter PT 1000 100.0 l/Imp.	C4	1	R20F92000 M 0030	311,65
Heat meter PT 1000 100.0 l/Imp.	C4	1	R20F91000 M 0030	311,65

Note: Article numbers refer to the English language version and 10-year battery.

Other split calculator variants are available on request:

- Adaptations for glycol additives
- Heat meters with cooling option
- For temperature sensor connection PT100 or PT500
- Devices with 6-year battery
- Display of decimal places
- Volume measurement in the supply flow (hot pipe)
- Display unit kWh, MJ, kJ
- Marking languages: German, English, Italian, Spanish, Lithuanian

3.5 | Temperature sensors

Paired temperature sensors for split heat meters

- incl. accessories for direct measurement or for use in common immersion sleeves
- approved and marked according to EN1434
- 2-wire technology with PT1000 measuring resistor
- Use in the temperature range 0 to +150 °C and up to a system pressure of 25 bar possible
- silicone connection cables and wire end sleeves with various lengths available



Ø 5,0 mm und Ø 6,0 mm
Universal with cable clompings for immersion depths in common immersion sleeves of 45 to 210 mm

Product description	Group	PCS / PU	Part no.	€ / PU
TS pair MID PT1000 - Ø 5,0 mm - 3,0 m cable - 150°C (universal)	C4	1	FTF0035	81,83
TS pair MID PT1000 - Ø 6,0 mm - 3,0 m cable - 150°C (universal)	C4	1	FTF0039	81,83
TS pair MID PT1000 - Ø 5,0 mm - 10 m cable - 150°C (universal)	C4	1	FTF0036	131,39
TS pair MID PT1000 - Ø 6,0 mm - 10 m cable - 150°C (universal)	C4	1	FTF0040	131,39

Ø 5,2 mm, AGFW 27,5 mm and AGFW 38 mm

Product description	Group	PCS / PU	Part no.	€ / PU
TS pair MID PT1000 - Ø 5,2 mm - 3,0 m cable - 150°C	C4	1	FTF0037	81,83
TS pair MID PT1000 - Ø 5,2 mm - 10 m cable - 150°C	C4	1	FTF0038	131,39
TS pair MID PT1000 - AGFW 27,5 mm - 2,5 m cable - 150°C	C4	1	FTF0018	81,83
TS pair MID PT1000 - AGFW 38,0 mm - 2,5 m cable - 150°C	C4	1	FTF0027	92,62
TS pair MID PT1000 - AGFW 27,5 mm - 10 m cable - 150°C	C4	1	FTF0019	179,91
TS pair MID PT1000 - AGFW 38,0 mm - 10 m cable - 150°C	C4	1	FTF0028	238,87

3 | Split heat meters



3.6 | Q heat split - article number matrix

Product family + version

	A A A	B B B B	C C	D	E F G H	Price device
Heat meter with threaded connections	G 0 3	x x x x	x x	x	x x x x	146,83 €
Heat meter with flange connections	G 0 4	x x x x	x x	x	x x x x	146,83 €
Heat meter with cooling option with threaded connections	G 1 3	x x x x	x x	x	x x x x	188,15 €
Heat meter with cooling option with flange connections	G 1 4	x x x x	x x	x	x x x x	188,15 €
Solar heat meter with threaded connections	G 1 8	x x x x	x x	x	x x x x	263,59 €
Solar heat meter with flange connections	G 1 9	x x x x	x x	x	x x x x	263,59 €

Ultrasonic flow sensors - thread

	A A A	B B B B	C C	D	E F G H	ASN code flow sensor	Price flow sensor
Ultrasonic / any installation position / qp 0.6 m³/h - G ¾" x 110 mm	G x x	5 0 0 6	x x	x	x x x x	50594587H 4	171,78 €
Ultrasonic / any installation position / qp 0.6 m³/h - G 1" x 130 mm	G x x	5 0 0 6	x x	x	x x x x	50595000H 4	177,94 €
Ultrasonic / any installation position / qp 0.6 m³/h - G 1" x 190 mm	G x x	5 0 0 6	x x	x	x x x x	50595001H 4	188,15 €
Ultrasonic / any installation position / qp 1.5 m³/h - G ¾" x 110 mm	G x x	5 0 1 5	x x	x	x x x x	50594588H 5	171,78 €
Ultrasonic / any installation position / qp 1.5 m³/h - G ¾" x 130 mm	G x x	5 0 1 5	x x	x	x x x x	50595002H 4	188,15 €
Ultrasonic / any installation position / qp 1.5 m³/h - G 1" x 190 mm	G x x	5 0 1 5	x x	x	x x x x	50595003H 4	195,69 €
Ultrasonic / any installation position / qp 2.5 m³/h - G 1" x 130 mm	G x x	5 0 2 5	x x	x	x x x x	50594589H 5	182,00 €
Ultrasonic / any installation position / qp 2.5 m³/h - G 1" x 190 mm	G x x	5 0 2 5	x x	x	x x x x	50595004H 4	239,80 €
Ultrasonic / any installation position / qp 3.5 m³/h - G 1¼" x 260 mm	G x x	5 0 3 5	x x	x	x x x x	50593182H 5	370,50 €
Ultrasonic / any installation position / qp 3.5 m³/h - G 1¼" x 135 mm	G x x	5 0 3 5	x x	x	x x x x	50595005H 4	440,72 €
Ultrasonic / any installation position / qp 3.5 m³/h - G 1¼" x 150 mm	G x x	5 0 3 5	x x	x	x x x x	50595006H 4	440,72 €
Ultrasonic / any installation position / qp 3.5 m³/h - G 1½" x 150 mm	G x x	5 0 3 5	x x	x	x x x x	50595019H 4	440,72 €
Ultrasonic / any installation position / qp 3.5 m³/h - G 1½" x 260 mm	G x x	5 0 3 5	x x	x	x x x x	50595018H 4	370,50 €
Ultrasonic / any installation position / qp 6.0 m³/h - G 1¼" x 260 mm	G x x	5 0 6 0	x x	x	x x x x	50593183H 4	370,50 €
Ultrasonic / any installation position / qp 6.0 m³/h - G 1¼" x 135 mm	G x x	5 0 6 0	x x	x	x x x x	50595007H 4	440,72 €
Ultrasonic / any installation position / qp 6.0 m³/h - G 1¼" x 150 mm	G x x	5 0 6 0	x x	x	x x x x	50595008H 4	440,72 €
Ultrasonic / any installation position / qp 6.0 m³/h - G 1½" x 150 mm	G x x	5 0 6 0	x x	x	x x x x	50595014H 4	492,95 €
Ultrasonic / any installation position / qp 6.0 m³/h - G 1½" x 260 mm	G x x	5 0 6 0	x x	x	x x x x	50595015H 4	492,95 €
Ultrasonic / any installation position / qp 6.0 m³/h - G 2" x 150 mm	G x x	5 0 6 0	x x	x	x x x x	50595017H 4	538,27 €
Ultrasonic / any installation position / qp 10.0 m³/h - G 2" x 300 mm	G x x	5 1 0 0	x x	x	x x x x	50593184H 4	538,22 €
Ultrasonic / any installation position / qp 10.0 m³/h - G 2" x 200 mm	G x x	5 1 0 0	x x	x	x x x x	50595009H 4	607,05 €

Ultrasonic flow sensors - flange

	A A A	B B B B	C C	D	E F G H	ASN code flow sensor	Price flow sensor
Ultrasonic / any installation position / qp 3.5 m³/h - FL DN25 260 mm	G x x	5 0 3 5	x x	x	x x x x	50593188H 4	553,19 €
Ultrasonic / any installation position / qp 6.0 m³/h - FL DN25 260 mm	G x x	5 0 6 0	x x	x	x x x x	50593189H 4	553,19 €
Ultrasonic / any installation position / qp 6.0 m³/h - FL DN32 260 mm	G x x	5 0 6 0	x x	x	x x x x	50595016H 4	582,44 €
Ultrasonic / any installation position / qp 10.0 m³/h - FL DN40 300 mm	G x x	5 1 0 0	x x	x	x x x x	50593190H 4	728,92 €
Ultrasonic / any installation position / qp 15.0 m³/h - FL DN50 270 mm	G x x	5 1 5 0	x x	x	x x x x	50593191H 5	1.130,75 €
Ultrasonic / any installation position / qp 25.0 m³/h - FL DN65 300 mm	G x x	5 2 5 0	x x	x	x x x x	50593192H 5	1.307,30 €
Ultrasonic / any installation position / qp 40.0 m³/h - FL DN80 300 mm	G x x	5 4 0 0	x x	x	x x x x	50593193H 5	1.577,54 €
Ultrasonic / any installation position / qp 60.0 m³/h - FL DN100 360 mm	G x x	5 4 0 0	x x	x	x x x x	50595013H 5	1.832,05 €

Woltman-jet flow sensors - flange

	A A A	B B B B	C C	D	E F G H	ASN code flow sensor	Price flow sensor
Woltman-jet / horizontal / qp 15.0 m³/h - FL DN50 270 mm	G x x	0 1 5 0	x x		x x x x	50533148H 4	920,78 €
Woltman-jet / horizontal / qp 25.0 m³/h - FL DN65 300 mm	G x x	0 2 5 0	x x		x x x x	50533149H 4	958,16 €
Woltman-jet / horizontal / qp 40.0 m³/h - FL DN80 300 mm	G x x	0 4 0 0	x x		x x x x	50533150H 4	1.087,00 €
Woltman-jet / horizontal / qp 60.0 m³/h - FL DN100 360 mm	G x x	0 6 0 0	x x		x x x x	50533151H 4	1.502,18 €
Woltman-jet / horizontal / qp 150.0 m³/h - FL DN150 500 mm	G x x	3 1 5 0	x x		x x x x	50595020H 4	2.589,06 €
Woltman-jet / horizontal + vertical / qp 15.0 m³/h - FL DN50 200 mm	G x x	2 1 5 0	x x		x x x x	50533152H 4	920,78 €
Woltman-jet / horizontal + vertical / qp 25.0 m³/h - FL DN65 200 mm	G x x	2 2 5 0	x x		x x x x	50533153H 4	958,16 €
Woltman-jet / horizontal + vertical / qp 32.0 m³/h - FL DN80 225 mm	G x x	2 4 0 0	x x		x x x x	50533154H 4	1.087,00 €
Woltman-jet / horizontal + vertical / qp 50.0 m³/h - FL DN100 250 mm	G x x	2 6 0 0	x x		x x x x	50533155H 4	1.502,18 €
Woltman-jet / horizontal + vertical / qp 80.0 m³/h - FL DN125 250 mm	G x x	3 1 0 0	x x		x x x x	50590986H 4	1.940,34 €
Woltman-jet / horizontal + vertical / qp 200.0 m³/h - FL DN150 300 mm	G x x	3 1 5 0	x x		x x x x	50590987H 4	2.589,06 €
Woltman-jet / horizontal + vertical / qp 200.0 m³/h - FL DN200 350 mm	G x x	3 1 5 0	x x		x x x x	50590988H 4	3.207,71 €

3 | Split heat meters



3.6 | Q heat split - part number matrix

Logo	A A A	B B B B	C C	D	E F G H	Price
QUNDIS	G x x	x x x x	0 x	x	x x x x	- €
Temperature sensor						
5,0 x 45 mm / 3,0 m cable (universal), art.-no.: FTF0035	G x x	x x x x	x X	x	x x x x	81,83 €
6,0 x 60 mm / 3,0 m cable (universal), art.-no.: FTF0039	G x x	x x x x	x X	x	x x x x	81,83 €
5,0 x 45 mm / 10,0 m cable (universal), art.-no.: FTF0036	G x x	x x x x	x X	x	x x x x	131,39 €
6,0 x 60 mm / 10,0 m cable (universal), art.-no.: FTF0040	G x x	x x x x	x X	x	x x x x	131,39 €
5,2 x 45 mm / 3,0 m cable, art.-no.: FTF0037	G x x	x x x x	x X	x	x x x x	81,83 €
5,2 x 45 mm / 10,0 m cable, art.-no.: FTF0038	G x x	x x x x	x X	x	x x x x	131,39 €
AGFW 27,5 mm / 2,5 m cable, art.-no.: FTF0018	G x x	x x x x	x X	x	x x x x	81,83 €
AGFW 38,0 mm / 2,5 m cable, art.-no.: FTF0027	G x x	x x x x	x X	x	x x x x	92,63 €
AGFW 27,5 mm / 10,0 m cable, art.-no.: FTF0019	G x x	x x x x	x X	x	x x x x	179,91 €
AGFW 38,0 mm / 10,0 m cable, art.-no.: FTF0028	G x x	x x x x	x X	x	x x x x	238,87 €
Initial calibration						
heat MID, cold without (standard)	G x x	x x x x	x x	M	x x x x	- €
heat without, cold without	G x x	x x x x	x x	E	x x x x	- €
Power supply						
6-year battery	G x x	x x x x	x x	x	0 x x x	- €
10-year battery	G x x	x x x x	x x	x	1 x x x	5,80 €
6-year battery + 2nd battery (for Ultrasonic)	G x x	x x x x	x x	x	3 x x x	26,43 €
10-year battery + 2nd battery (for Ultrasonic)	G x x	x x x x	x x	x	4 x x x	32,23 €
Installation location for flow sensor						
Return flow (cold pipe)	G x x	x x x x	x x	x	0 x x	- €
Supply flow (hot pipe)	G x x	x x x x	x x	x	1 x x	68,25 €
Internal communication module						
none	G x x	x x x x	x x	x	x x 0 x	- €
Approval mark + marking language						
MID, German	G x x	x x x x	x x	x	x x x 0	- €
MID, English	G x x	x x x x	x x	x	x x x 3	- €
MID, Italian	G x x	x x x x	x x	x	x x x 4	- €
MID, Spanish	G x x	x x x x	x x	x	x x x 5	- €
MID, Lithuanian	G x x	x x x x	x x	x	x x x 8	- €

4 | Water meters

Water meters are mainly used in business to measure hot and cold water consumption. QUNDIS supplies water meters both as screw-type and capsule meter variants. Depending on the type of meter and installation material used, they can be mounted on-wall or in-wall directly in the water pipe. An impellor sensor measures the flow, with the cumulated consumption either shown by a counter on mechanical water meters or on a display in the case of electronic water meters.

As a recognised State Testing Centre for water meters, we can calibrate water meters and check their functionality and precision. This also allows us to use this quality assurance tool for our own developments of course, and put new developments and devices through their paces under real conditions.



4 | Water meters



4.1 | Q water 5.5 - Electronic screw-type water meters

The water meter generation from QUNDIS provides both screw-type and capsule meters. Thanks to a great selection of measuring capsule versions for the most common connection interfaces from all major manufacturers, nearly every installation situation can be handled. With the improved radio performance and flexibility during readout, the Q water 5.5 is setting new standards.

Product details:

- MID-compliant screw-type and measuring capsule water meter (precision classes R80 horizontal /R40 vertical)
- Easy fitting thanks to a plastic capsule seal and automatic radio activation
- No parameterising required
- High device protection level (IP68)
- IrDA-interface for readout and parameterisation of the water meter
- 360° rotatable calculator unit with 8-digit LC display
- Horizontal and vertical installation possible
- Counts forwards and backwards
- Leaks are reported
- Electronic scanning makes tampering impossible
- Saving of 13 monthly values

Communication: Radio



- **C-Mode** features see page 1
- switch from C- to S-Mode possible



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Permanent flow rate Q₃ 2.5 m³/h - Connection thread G 3/4" (ISO 228) - Nominal width 15 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 80 mm				
max. 30 °C water temperature	MF	1	WME5010T0011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011T0011 00V00	110,50
Installation length 110 mm				
max. 30 °C water temperature	MF	1	WME5010T1011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011T1011 00V00	110,50

Permanent flow rate Q₃ 4.0 m³/h - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 130 mm				
max. 30 °C water temperature	MF	1	WME5010T2011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011T2011 00V00	110,50

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.



4 | Water meters



4.2 | Q water 4 - Mechanical screw-type water meters

Communication: basic (module shaft: type MODULARIS)



Mechanical water meter on-wall (single-jet)

- Dry runner, impeller wheel
- Module shaft for retrofitting external communication modules type MODULARIS
- MID approval



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Permanent flow rate Q_3 2.5 m³/h - Connection thread G 3/4" (ISO 228) - Nominal width 15 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 80 mm				
Q water 4 - max. 30 °C water temperature	MA	1	WMM400000001 00V00	42,83
Q water 4 - max. 90 °C water temperature	MA	1	WMM400100001 00V00	42,83
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH000000001 Z6V00	35,29
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH001000001 Z6V00	35,29
Installation length 110 mm				
Q water 4 - max. 30 °C water temperature	MA	1	WMM400001001 00V00	42,83
Q water 4 - max. 90 °C water temperature	MA	1	WMM400101001 00V00	42,83
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH000001001 Z6V00	35,29
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH001001001 Z6V00	35,29
Installation length 115 mm (Q_3 2.5 m³/h)				
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH0000Y005 Z6V00	35,29
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH0010Y005 Z6V00	35,29
Installation length 130 mm (Q_3 2.5 m³/h)				
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH00003001 Z6V00	51,77
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH00103001 Z6V00	51,77

Permanent flow rate Q_3 4.0 m³/h - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 130 mm				
Q water 4 - max. 30 °C water temperature	MA	1	WMM400002001 00V00	56,99
Q water 4 - max. 90 °C water temperature	MA	1	WMM400102001 00V00	56,99
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH000002001 Z6V00	51,77
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH001002001 Z6V00	51,77
Installation length 115 mm (Q_3 4.0 m³/h)				
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH0000Z005 Z6V00	42,83
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH0010Z005 Z6V00	42,83

4.2 | Q water 4 - Mechanical screw-type water meters

Communication: basic (module shaft: type MODULARIS)

Mechanical water meter on-wall (single-jet)

- Dry runner, impeller wheel
- Module shaft for retrofitting external communication modules type MODULARIS
- MID approval



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

SPECIAL INSTALLATION LENGTH

Permanent flow rate Q₃ 2.5 m³/h - Connection thread G 3/4" (ISO 228) - Nominal width 15 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 130 mm				
Q water 4 - max. 30 °C water temperature	MA	1	WMM400003001 00V00	56,99
Q water 4 - max. 90 °C water temperature	MA	1	WMM400103001 00V00	56,99

Permanent flow rate Q₃ 2.5 m³/h - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 130 mm				
Q water 4 - max. 30 °C water temperature	MA	1	WMM40000S001 00V00	56,99
Q water 4 - max. 90 °C water temperature	MA	1	WMM40010S001 00V00	56,99
Q water 4 (SJ EVO) - max. 30 °C water temperature	MA	1	WMMH00003001 Z6V00	51,77
Q water 4 (SJ EVO) - max. 90 °C water temperature	MA	1	WMMH00103001 Z6V00	51,77

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

4 | Water meters



4.2.1 | Q water 4 - Mechanical screw-type water meters

Communication: basic (module shaft type SJ PLUS)



Mechanical water meter on-wall (single-jet)

- Dry runner, impeller wheel
- Module shaft for retrofitting external communication modules type SJ Plus
- MID approval



image similar

ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Permanent flow rate Q₃ 2.5 m³/h - Connection thread G 3/4" (ISO 228) - Nominal width 15 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 80 mm				
Q water 4 (SJ PLUS) - max. 30 °C water temperature	MA	1	WMMH00000001 Z2V00	35,29
Q water 4 (SJ PLUS) - max. 90 °C water temperature	MA	1	WMMH00100001 Z2V00	35,29
Installation length 110 mm				
Q water 4 (SJ PLUS) - max. 30 °C water temperature	MA	1	WMMH00001001 Z2V00	35,29
Q water 4 (SJ PLUS) - max. 90 °C water temperature	MA	1	WMMH00101001 Z2V00	35,29

Permanent flow rate Q₃ 4.0 m³/h - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 130 mm				
Q water 4 (SJ PLUS) - max. 30 °C water temperature	MA	1	WMMH00002001 Z2V00	51,77
Q water 4 (SJ PLUS) - max. 90 °C water temperature	MA	1	WMMH00102001 Z2V00	51,77

Reed pulse out modul for mechanical screw-type water meters type SJ PLUS (4.2.1)

Reed pulse out modul for mechanical water meters of type SJ PLUS
(suitable for Q water 4 mechanical water meters type SJ PLUS)



Product description	Group	Qty.	Part no.	Price (€)
Reed pulse out add-on module 10 l/pulse (for SD PLUS / SJ PLUS)	MK	1	PWMH006V0000 Z0V00	21,44

4.3 | Q water 5.5 - Electronic measuring capsule water meters

The new water meter generation from QUNDIS provides both screw-type and capsule meters. Thanks to a **great selection of measuring capsule versions for the most common connection interfaces** from all major manufacturers, nearly every installation situation can be handled. With the improved radio performance and the flexibility during readout, the Q water 5.5 is setting new standards.

Product details:

- MID-compliant screw-type and measuring capsule water meter (precision classes R80 horizontal /R40 vertical)
- Easy fitting thanks to a plastic capsule seal and automatic radio activation
- No parameterising required
- High device protection level (IP68)
- infrared-interface for readout and parameterisation of the water meter
- 360° rotatable calculator unit with 8-digit LC display
- Horizontal and vertical installation possible
- Counts forwards and backwards
- Leaks are reported
- Electronic scanning makes tampering impossible
- Saving of 13 monthly values



4 | Water meters



4.3 | Q water 5.5 - Electronic measuring capsule water meters

Communication: Radio



- C-Mode features see page 1
- switch from C- to S-Mode possible



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Connection interface IST (Ista) - Connection thread G 2" - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5000T4111 00V00	110,50
max. 90 °C water temperature	MF	1	WME5001T4111 00V00	110,50

Connection interface A34 (Allmess) - Connection thread M77 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5000T6111 00V00	110,50
max. 90 °C water temperature	MF	1	WME5001T6111 00V00	110,50

Connection interface TE1 (Techem) - Connection thread M62 x 2 - Permanent flow rate Q₃ 2,5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010T8111 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011T8111 00V00	110,50

Note: The Q water 5.5 - connection interface TE1 - is not compatible with the original thrust tubes and covers. Suitable thrust tubes and covers can be found in our digital accessories price list.

Connection interface MOC/MOE (Elster/ABB) - Connection thread M65 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5000TA111 00V00	110,50
max. 90 °C water temperature	MF	1	WME5001TA111 00V00	110,50

Connection interface MET (Brunata/Metrone HT3) - Connection thread M64 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TC111 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TC111 00V00	110,50

4 | Water meters



4.3 | Q water 5.5 - Electronic measuring capsule water meters

Communication: Radio



Connection interface HT2 (Brunata HT2/Metrone 307) - Connection thread M66 x 1 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TE011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TE011 00V00	110,50

Connection interface MB3 (Minol) - Connection thread M76 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TJ011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TJ011 00V00	110,50

Connection interface DM1 (Deltamess TK) - Connection thread M60 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TT011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TT011 00V00	110,50

Connection interface MUK (Sensus PolluMUK) - Connection thread G2 1/4" - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TV011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TV011 00V00	110,50

Connection interface WE1 (Wehrle) - Connection thread M78 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TW011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TW011 00V00	110,50

Connection interface WGU (Wassergeräte) - Connection thread M66 x 1.25 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MF	1	WME5010TX011 00V00	110,50
max. 90 °C water temperature	MF	1	WME5011TX011 00V00	110,50

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.



4 | Water meters



4.4 | Q water 4 - Mechanical measuring capsule water meters

Communication: basic (module shaft: type MODULARIS)



Mechanical water meter measuring capsule

- Dry runner, impeller wheel
- module shaft for retrofitting external communication modules type MODULARIS
- MID approval



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Connection interface IST (Ista) - Connection thread G 2" - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM400004001 00V00	47,41
max. 90 °C water temperature	MD	1	WMM400104001 00V00	47,41

Connection interface A34 (Allmess) - Connection thread M77 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM400006001 00V00	60,24
max. 90 °C water temperature	MD	1	WMM400106001 00V00	60,24

Connection interface TE1 (Techem) - Connection thread M62 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM400008001 00V00	60,24
max. 90 °C water temperature	MD	1	WMM400108001 00V00	60,24

Connection interface MOC/MOE (Elster/ABB) - Connection thread M65 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000A001 00V00	48,58
max. 90 °C water temperature	MD	1	WMM40010A001 00V00	48,58

Connection interface MET (Brunata/Metrona HT3) - Connection thread M64 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000C001 00V00	58,04
max. 90 °C water temperature	MD	1	WMM40010C001 00V00	58,04

Connection interface HT2 (Brunata HT2/Metrona 307) - Connection thread M66 x 1 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000E001 00V00	72,08
max. 90 °C water temperature	MD	1	WMM40010E001 00V00	72,08

4 | Water meters



4.4 | Q water 4 - Mechanical measuring capsule water meters

Communication: basic (module shaft: type MODULARIS)



Connection interface MB3 (Minol) - Connection thread M76 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000J001 00V00	83,45
max. 90 °C water temperature	MD	1	WMM40010J001 00V00	83,45

Connection interface MB2 (Minol) - Connection thread M80 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000G001 00V00	83,45
max. 90 °C water temperature	MD	1	WMM40010G001 00V00	83,45

Connection interface DM1 (Deltamess TK) - Connection thread M60 x 2 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000T001 00V00	72,08
max. 90 °C water temperature	MD	1	WMM40010T001 00V00	72,08

Connection interface MUK (Sensus PolluMUK)- Connection thread G2 1/4" - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000V001 00V00	60,24
max. 90 °C water temperature	MD	1	WMM40010V001 00V00	60,24

Connection interface WE1 (Wehrle)- Connection thread M78 x 1.5 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000W001 00V00	74,17
max. 90 °C water temperature	MD	1	WMM40010W001 00V00	74,17

Connection interface WGU (Wassergeräte) - Connection thread M66 x 1.25 - Permanent flow rate Q₃ 2.5 m³/h

Product description	Group	Qty.	Part no.	Price (€)
max. 30 °C water temperature	MD	1	WMM40000X001 00V00	72,08
max. 90 °C water temperature	MD	1	WMM40010X001 00V00	72,08

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

4 | Water meters



4.5 | Q water 5.5 - article number matrix

Product family	Block1	Block2	Block3	Block4	Basic Price
Electronic Water Meter	WME 5	x x x x	x x x x	x x x x x	110,50 €
Logo	Block1	Block2	Block3	Block4	Extra charge
QUNDIS (standard)	WME 5	0 0 x x	x x x x	x x x x x	- €
QUNDIS (standard)	WME 5	0 1 x x	x x x x	x x x x x	- €
Logo variants on request					
Version	Block1	Block2	Block3	Block4	Extra charge
Cold Water	WME 5	x x 0 x	x x x x	x x x x x	- €
Warm Water	WME 5	x x 1 x	x x x x	x x x x x	- €
Communication interface	Block1	Block2	Block3	Block4	Extra charge
infrared + walk-by + AMR (S-Mode)	WME 5	x x x N	x x x x	x x x x x	- €
infrared + walk-by + AMR (C-Mode)	WME 5	x x x T	x x x x	x x x x x	- €
Flow sensor*	Block1	Block2	Block3	Block4	Extra charge
Screwed connection Q3 2,5 m³/h (MID) - 80 mm, G3/4"	WME 5	x x x x	0 x x x	x x x x x	- €
Screwed connection - Q3 2,5 m³/h - 110 mm, G3/4"	WME 5	x x x x	1 x x x	x x x x x	- €
Screwed connection - Q3 4 m³/h - 130 mm, G1"	WME 5	x x x x	2 x x x	x x x x x	- €
Capsule IST (Ista) - Q3 2,5 m³/h	WME 5	x x x x	4 x x x	x x x x x	- €
Capsule A34 (Allmess) - Q3 2,5 m³/h	WME 5	x x x x	6 x x x	x x x x x	- €
Capsule TE1 (Techem) - Q3 2,5 m³/h	WME 5	x x x x	8 x x x	x x x x x	- €
Capsule MOC/MOE (Elster) - Q3 2,5 m³/h	WME 5	x x x x	A x x x	x x x x x	- €
Capsule MET (Brunata HT3) - Q3 2,5 m³/h	WME 5	x x x x	C x x x	x x x x x	- €
Capsule HT2 (Brunata HT2) - Q3 2,5 m³/h	WME 5	x x x x	E x x x	x x x x x	- €
Capsule MB3 (Minol MB3) - Q3 2,5 m³/h	WME 5	x x x x	J x x x	x x x x x	- €
Capsule DM1 (Deltamess TKS) - Q3 2,5 m³/h	WME 5	x x x x	T x x x	x x x x x	- €
Capsule MUK (Sensus Pollu-Muk) - Q3 2,5 m³/h	WME 5	x x x x	V x x x	x x x x x	- €
Capsule WE1 (Wehrle) - Q3 2,5 m³/h	WME 5	x x x x	W x x x	x x x x x	- €
Capsule WGU (Wassergeräte) - Q3 2,5 m³/h	WME 5	x x x x	X x x x	x x x x x	- €
*Designation according to ISO 4064 (common designation in brackets)					
Measurement unit material	Block1	Block2	Block3	Block4	Extra charge
Brass (not to configure)	WME 5	x x x x	x 0 x x	x x x x x	- €
Plastic (not to configure)	WME 5	x x x x	x 1 x x	x x x x x	- €
Power supply	Block1	Block2	Block3	Block4	Extra charge
Battery 10 years (standard)	WME 5	x x x x	x x 1 x	x x x x x	- €
Approval + Measuring accuracy (Q3/Q1)	Block1	Block2	Block3	Block4	Extra charge
MID - R80H / R40V (standard)	WME 5	x x x x	x x x 1	x x x x x	- €
Due date	Block1	Block2	Block3	Block4	Extra charge
31.12. (standard)	WME 5	x x x x	x x x x	0 x x x x	- €
Interface for add-on modules	Block1	Block2	Block3	Block4	Extra charge
none (standard)	WME 5	x x x x	x x x x	x 0 x x x	- €
Labeling and documentation	Block1	Block2	Block3	Block4	Extra charge
German / English / French / Spanish / Italian (standard)	WME 5	x x x x	x x x x	x x V x x	- €
Display	Block1	Block2	Block3	Block4	Extra charge
m³ (standard)	WME 5	x x x x	x x x x	x x x 0 x	- €
Special options	Block1	Block2	Block3	Block4	Extra charge
none (standard)	WME 5	x x x x	x x x x	x x x x 0	- €
AES-encryption, Security Mode 5 according to EN 13757-7,	WME 5	x x x T	x x x x	x x x x V	- €
Security Profile A according to OMS specification (only for C-Mode devices)					

4 | Water meters



4.6 | Q water 5.5 - Electronic valve- and bath meters

The new electronic valve and bath meters include a connection kit for valve or bath meters as well as a Q water 5.5 IST. That means the new connection kits can be combined with every version of the Q water 5.5 with connection interface IST and connection thread G2" (S-Mode, C-Mode, hot, cold).

Valve meter-connection kit for Q water 5.5 (new installation)

Valve meter connection kit for electronic water meter Q water 5.5 - with connection interface IST - connection thread G 2" - permanent flow rate Q_3 2.5 m³/h

The connection kit includes:

- Chrome-plated valve meter fittings
- Centre section
- Chrome-plated connection housing
- Accessories for installing of the valve meter (seals, O-rings, etc.)



Please note:

The Q water 5.5 is not part of the connection kit. Please find the matching Q water 5.5 with connection interface IST - connection thread G 2" - permanent flow Q_3 2.5 m³/h on page 51 (C-Mode) in the device price list.

Connection set and extensions as well as rosettes are not included in the scope of the valve meter connection kit (new installation). They can be found in the accessories price list.

Product description	Group	Qty.	Part no.	Price (€)
Valve meter connection kit for Q water 5.5	5G	1	BBV5520	69,98

Bath meter-connection kit for Q water 5.5 (new installation)

Bath meter connection kit for electronic water meter Q water 5.5 - with connection interface IST - connection thread G 2" - permanent flow rate Q_3 2.5 m³/h

The connection kit includes:

- Chrome-plated bath meter fittings
- Centre section
- Chrome-plated connection housing
- Accessories for installing of the bath meter (seals, O-rings, etc.)



Please note:

The Q water 5.5 is not part of the connection kit. Please find the matching Q water 5.5 with connection interface IST - connection thread G 2" - permanent flow Q_3 2.5 m³/h on page 51 (C-Mode) in the device price list.

Product description	Group	Qty.	Part no.	Price (€)
Bath meter connection kit for Q water 5.5	5G	1	BBV5522	87,21

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

Replacement connection kit for valve and bath meter for Q water 5.5

Replacement connection kit for electronic water meter Q water 5.5 - with connection interface IST - connection thread G 2" - permanent flow rate Q₃ 2.5 m³/h for the replacement of electronic valve and bath meters from QUNDIS of the WMx36.DVN series

The connection kit includes:

- Chrome-plated connection housing
- Centre section
- Accessories for installing of the connection kit (seals, O-rings, etc.)



Please note:

The Q water 5.5 is not part of the connection kit. Please find the matching Q water 5.5 with connection interface IST - connection thread G 2" - permanent flow Q₃ 2.5 m³/h on page 51 (C-Mode) in the device price list.

Product description	Group	Qty.	Part no.	Price (€)
Replacement connection kit for Q water 5.5	5G	1	BBV5521	39,87

Hot water cost allocator connection kit for Q water 5.5

Hot water cost allocator connection kit for existing retrofitted hot water cost allocators. The connection housing takes up the space of the TZ90 and is designed for mounting of a Q water 5.5 with connection interface IST and connection thread G2"

The connection kit includes:

- Chrome-plated connection housing
- Accessories for installing of the connection kit



Please note:

The Q water 5.5 is not part of the connection kit. Please find the matching Q water 5.5 with connection interface IST - connection thread G 2" - permanent flow Q₃ 2.5 m³/h on page 51 (C-Mode) in the device price list.

Product description	Group	Qty.	Part no.	Price (€)
Hot water cost allocator connection kit for Q water 5.5	5G	1	BBV5523	69,98

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

Mechanical residential water meters

- Multi-jet dry runner
- Module shaft for **retrofitting QUNDIS radio add-on modules type MODULARIS**
- 360° rotatable 8-digit totalizer
- Maximum pressure load 1,6 MPa
- MID approval



ALL PRICES INCL. FIXED FEE, CONFORMITY ASSESSMENT.

Permanent flow rate Q₃ 2.5 m³/h (former Qn 1.5 m³/h)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 165 mm (horizontal) - Connection thread G 3/4" (ISO 228) - Nominal width 15 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature *	MB	1	WMDH0000A001 Z0V00	138,12
Q water domestic (horizontal) - max. 90 °C water temperature *	MB	1	WMDH0010A001 Z0V00	138,12
Installation length 105 mm (ascending) - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)				
Q water domestic (ascending) - max. 30 °C water temperature *	MB	1	WMDH0000K001 Z0V00	174,11
Q water domestic (ascending) - max. 90 °C water temperature *	MB	1	WMDH0010K001 Z0V00	174,11

Permanent flow rate Q₃ 4.0 m³/h (former Qn 2.5 m³/h)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 190 mm (horizontal) - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature	MB	1	WMDH0000B001 Z0V00	138,12
Q water domestic (horizontal) - max. 90 °C water temperature *	MB	1	WMDH0010B001 Z0V00	138,12
Installation length 105 mm (ascending) - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)				
Q water domestic (ascending) - max. 30 °C water temperature	MB	1	WMDH0000L001 Z0V00	174,11
Q water domestic (ascending) - max. 90 °C water temperature *	MB	1	WMDH0010L001 Z0V00	174,11
Installation length 105 mm (descending) - Connection thread G 1" (ISO 228) - Nominal width 20 (DN)				
Q water domestic (descending) - max. 30 °C water temperature *	MB	1	WMDH0000U001 Z0V00	197,32
Q water domestic (descending) - max. 90 °C water temperature *	MB	1	WMDH0010U001 Z0V00	197,32

Permanent flow rate Q₃ 6.3 m³/h (former Qn 3.5 m³/h)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 260 mm (horizontal) - Connection thread G 1 1/4" (ISO 228) - Nominal width 25 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature *	MB	1	WMDH0000C001 Z0V00	214,73
Q water domestic (horizontal) - max. 90 °C water temperature *	MB	1	WMDH0010C001 Z0V00	214,73
Installation length 150 mm (ascending) - Connection thread G 1 1/4" (ISO 228) - Nominal width 25 (DN)				
Q water domestic (ascending) - max. 30 °C water temperature *	MB	1	WMDH0000M001 Z0V00	258,84
Q water domestic (ascending) - max. 90 °C water temperature *	MB	1	WMDH0010M001 Z0V00	258,84

4 | Water meters



4.7 | Q water domestic - Mechanical residential water meters - multi-jet dry runner

Communication: basic (module shaft: type MODULARIS)



Permanent flow rate Q_3 10 m³/h (former Qn 6.0 m³/h)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 260 mm (horizontal) - Connection thread G 1¼" (ISO 228) - Nominal width 25 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature	MB	1	WMDH0000D001 Z0V00	214,73
Q water domestic (horizontal) - max. 90 °C water temperature *	MB	1	WMDH0010D001 Z0V00	214,73
Installation length 270 mm (horizontal) - Connection thread G 1¼" (ISO 228) - Nominal width 25 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature *	MB	1	WMDH0000H001 Z0V00	755,62
Installation length 150 mm (ascending) - Connection thread G 1¼" (ISO 228) - Nominal width 25 (DN)				
Q water domestic (ascending) - max. 30 °C water temperature	MB	1	WMDH0000N001 Z0V00	258,84
Q water domestic (ascending) - max. 90 °C water temperature *	MB	1	WMDH0010N001 Z0V00	258,84

Permanent flow rate Q_3 16 m³/h (former Qn 10 m³/h)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 300 mm (horizontal) - Connection thread G 2" (ISO 228) - Nominal width 40 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature	MB	1	WMDH0000F001 Z0V00	381,87
Q water domestic (horizontal) - max. 90 °C water temperature *	MB	1	WMDH0010F001 Z0V00	381,87
Installation length 150 mm (ascending) - Connection thread G 2" (ISO 228) - Nominal width 40 (DN)				
Q water domestic (ascending) - max. 30 °C water temperature *	MB	1	WMDH0000P001 Z0V00	496,78
Q water domestic (ascending) - max. 90 °C water temperature *	MB	1	WMDH0010P001 Z0V00	496,78
Installation length 200 mm (ascending) - Connection thread G 2" (ISO 228) - Nominal width 40 (DN)				
Q water domestic (ascending) - max. 30 °C water temperature *	MB	1	WMDH0000Q001 Z0V00	518,83

Permanent flow rate Q_3 25 m³/h (former Qn 15 m³/h)

Product description	Group	Qty.	Part no.	Price (€)
Installation length 270 mm (horizontal) - Connection thread G 2½" (ISO 228) - Nominal width 50 (DN)				
Q water domestic (horizontal) - max. 90 °C water temperature *	MB	1	WMDH0010G001 Z0V00	685,97
Installation length 270 mm (horizontal) - Connection flange - FL50				
Q water domestic (horizontal) - max. 30 °C water temperature *	MB	1	WMDH0000I001 Z0V00	811,10
Installation length 300 mm (horizontal) - Connection thread G 2½" (ISO 228) - Nominal width 50 (DN)				
Q water domestic (horizontal) - max. 30 °C water temperature *	MB	1	WMDH0000G001 Z0V00	685,97
Installation length 300 mm (horizontal) - Connection flange - FL50				
Q water domestic (horizontal) - max. 30 °C water temperature *	MB	1	WMDH0000J001 Z0V00	713,83

* Availability and delivery times on request.

Additional variants on request.

Smoke alarms serve to detect and signal the development of smoke and/or heat. DIN 14676 - the application standard for smoke alarms - regulates the planning, installation, operation and servicing of smoke alarms in residential houses, flats and rooms used for residence purposes on the (German) national level. DIN EN 14604 is the European product standard for smoke alarms. This describes the performance criteria and test methods used for the devices. In Germany, the obligation to equip residential buildings with smoke alarms is regulated by the building laws of the different regional states.



5 | Smoke alarm



5.1 | Ei6500-OMS - Smoke alarm radio with remote inspection (Type C)

The proven radio smoke alarm **Ei6500-OMS** with integrated radio meets all requirements for complete remote inspection (design type C) according to DIN 14676.

Product details:

- Remote inspection by integrated WM-Bus remote inspection module according to DIN 14676-1 (method C)
- Interoperability through OMS standard
- AES-128 encrypted radio data transmission OMS-Encryption Mode 5
- Ultrasonic obstacle detection
- Disassembly detection
- User-friendly user button (entire housing cover)
- Compatible with Ei650 series mounting base
- Testing standards: DIN EN 14604 / VdS 3131 / vfdb-Richtlinie 14/01 („Q-Label“)
- service life of 10 years

Please note: Delivery only with AES encryption. The electronic QUNDIS delivery note (eLS, csv file) will be provided for key management. Automatic decryption is possible on a tariff basis within the QUNDIS Smart Metering Platform (Q SMP).

Communication: Radio



C-Mode features - see page 1

- incl. mounting material for screw mounting



Q AMR: with Q gateway 5.5 direct or with Q node 5.5 (as of version 4.2) / Q gateway 5

Q walk-by: for readout with Q tool + Q app (as of version 1.05)

Please note: You can only order the radio smoke alarm in batch sizes of 20 pieces.

Product description	Group	Qty.	Part no.	Price (€)
Ei6500-OMS, C-Mode (Q walk-by + Q AMR) <i>sale and delivery in packing units of 20 units each</i>	H2	1 PU	SDTHZZ7H3000 0000V	1.295,80

5 | Smoke alarm



5.2 | Ei650i - Smoke alarm standalone (Type A)

The smoke alarm **Ei650i** alerts early-on and reliably during smouldering fires and open flames with smoke development. The intelligent evaluation electronics prevents false alarms and efficient battery management makes battery service lives of 10 years possible.

Product details:

- 85 dB alarm signal at a distance of 3 m
- Large test/mute button
- Permanently installed lithium battery for a service life of 10 years (removal of battery not possible)
- Self-monitoring
- Contamination prediction
- Extended mute function
- Dismantling detection and optional dismantling lock

Communication: basic



Smoke alarm standalone - Ei650i

incl. mounting material for screw mounting



Please note: You can only order the radio smoke alarm in batch sizes of 20 pieces.

Product description	Group	Qty.	Part no.	Price (€)
Ei650i (standalone) Sale and delivery in packing units of 20 units each	H1	1 PU	SDTHZZ900000 00000	597,80

Installation material

Suitable installation material can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

6 | Further system components data readout



6 | Further system components data readout

6.1 | Q module 5.5 - Add-on radio modules for mechanical water meters



Communication: Radio



Radio add-on modules suitable for radio prepared water meters of type MODULARIS

(suitable for mechanical water meters type Q water 4, Q water 4 SJ EVO and Q water domestic)



Standard version: Due date 31.12.

(additional options are possible on request or can be changed onsite with the Q suite 5 software)

- **C-Mode** features see page 1
- switch from C- to S-Mode possible

Q AMR: features usable with a complete Q node 5.5 AMR network or with Q gateway 5.5 direct

Q walk-by: requirement for readout: Q tool + Q app or Q log 5.5 + current version of ACT46 (mixed operations with WFZ166.MO possible)



Please note: Supplied in batches of 10 pieces.

Product description	Group	Qty.	Part no.	Price (€)
Q module 5.5 water Modularis, C-Mode (Q walk-by + Q AMR)	5T	1	RWM5000T0000 00000	79,15

Communication: Radio



Radio add-on modules suitable for radio prepared water meters of type ALLMESS

(suitable for series / system: MK +m and V +m)



Standard version: Due date 31.12.

(additional options are possible on request or can be changed onsite with the Q suite 5 software)

- **C-Mode** features see page 1
- switch from C- to S-Mode possible

Q AMR: features usable with a complete Q node 5.5 AMR network or with Q gateway 5.5 direct

Q walk-by: requirement for readout: Q tool + Q app or Q log 5.5 + current version of ACT46



Please note: Supplied in batches of 10 pieces.

Product description	Group	Qty.	Part no.	Price (€)
Q module 5.5 water Allmess, C-Mode (Q walk-by + Q AMR)	5T	1	RWM5004T0000 00000	84,50

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.



6 | Further system components data readout

6.2 | Q module 5.5 - Radio add-on modules for heat meters



Communication: Radio



Radio add-on module suitable for heat meters of the series Q heat 5 / 5.5 and calculator units R 20/21
(not suitable for Q heat 5.5 US)



The serial number, consumption and due date values are readout of the heat meter directly via an optical interface, which means parameter setting is not required for these data.

- **C-Mode** features see page 1
- switch from C- to S-Mode possible



Q AMR: features usable with a complete Q node 5.5 AMR network or with Q gateway 5.5 direct
Q walk-by: requirement for readout: Q tool + Q app or Q log 5.5 + current version of ACT46

Please note: Supplied in batches of 10 pieces.

Product description	Group	Qty.	Part no.	Price (€)
Q module 5.5 heat, C-Mode (Q walk-by + Q AMR)	5U	1	RHM500AT0000 Z0000	120,49

NOTE: In view of current market developments and the associated requirements in terms of system compatibility and interoperability, we no longer print S-Mode radio devices in the price list. Of course, you can still order S-Mode devices via our portal or internal service if required. See also the respective article number matrix.



6.3 | Radio Pulse Adapter



Radio- impulse adapter for the integration of consumption meters with impulse output into a Q AMR system

suitable for meters with impulse output from various manufacturers; one impulse input connectable; water meters, heat meters, heat/cooling meters etc. with impulse output and electricity meters with S0 interface can be integrated (pulse converter may be required)

with NFC interface for easy parameterisation via software

tamper detection if the pulse pick-up is interrupted or short-circuited (4-core cable)



Image similar



Communication: Radio Q AMR

Product description	Group	Qty.	Part no.	Price (€)
Q pulse R C-Mode (Q AMR)	B1	1	RPAH00WH1A00 00W00	82,90

7 | Further system components data readout Q AMR



7.1 | Q node 5.5 - Network nodes



Communication: Q AMR S-Mode + C-Mode

The network node Q node 5.5 receives, stores and distributes the consumption data of the QUNDiS measuring devices in S-Mode and C-Mode. Additionally the Q node 5.5 supports the reception and transmission of AES encrypted data telegrams for QUNDiS Q AMR C-Mode metering devices.

Due to the backwards compatibility with the Q node 5 and the WTT16... mixed operation is possible for S-Mode systems.

Q gateway 5 can be used for remote readout of Q AMR networks.

Local readout possible through the USB programming adapter RNNP-H001-0010 or through the M-bus interface and, in the RNN5-000M-1104 04000 version, also through the RS232 interface.

Please Note: Q heat 5.5 US devices (C-Mode) - see picture - cannot be received by Q node 5.5, remote readout possible by Q gateway 5.5 direct.



Product description	Group	Qty.	Part no.	Price (€)
Q node 5.5 with <u>battery supply</u>	5X	1	RNN5010M0004 04000	409,40
Q node 5.5 with <u>power supply</u> and RS232 interface	5X	1	RNN5010M1104 04000	568,26

7 | Further system components data readout Q AMR




7.2 | Q gateway 5 - Gateways



Communication: Q AMR

The function of the Q gateway 5 is the remote readout of a Q AMR network, combining fully automatic remote data readout operations with the monitoring of metering devices and the overall system. The Q gateway 5 can read out up to 2.500 metering devices and multiple AMR networks. Data transmission is by mobile communication (GPRS/EDGE/UMTS/HSPA). The Q gateway 5 is supplied ex works with a SIM card. All administrative and data recording operations are managed via the QUNDIS Smart Metering Platform (Q SMP).



Important note: The Q gateway 5 is only sold in combination with the booking of a QUNDIS Gateway Service Contract (GSD) for a minimum contractual period of five years. If the tariff includes AES decryption, this functionality can be cancelled annually at the end of a contract year. It is also possible to switch from an existing tariff to the tariff including decryption functionality.

Please note! Excluded from repurchase.

Version in degree of protection IP42

Product description	Tariff	Group	Qty.	Part no.	Price (€)
Data supply 2 x per month					
Q gateway 5 V3.0 with <u>battery supply</u> with tariff	QGW-A-024-0000	5Y	1	RNG5N02R3180 13000	632,03
Q gateway 5 V3.0 with <u>battery supply</u> with tariff <u>incl. Q SMP- decryption</u>	QGW-A-024-1000	5Y	1	RNG5N02R3180 1300M	632,03
Q gateway 5 V3.0 with <u>power supply</u> with tariff (e.g. for daily readout)	QGW-A-024-0000	5Y	1	RNG5N02R1180 13000	745,91
Data supply 1 x per week					
Q gateway 5 V3.0 with <u>battery supply</u> with tariff	QGW-A-052-0000	5Y	1	RNG5N02R3180 13001	632,03
Q gateway 5 V3.0 with <u>battery supply</u> with tariff <u>incl. Q SMP- decryption</u>	QGW-A-052-1000	5Y	1	RNG5N02R3180 1300X	632,03
Data supply daily					
Q gateway 5 V3.0 with <u>power supply</u> with tariff	QGW-A-365-0000	5Y	1	RNG5N02R1180 13002	745,91
Q gateway 5 V3.0 with <u>power supply</u> with tariff <u>incl. Q SMP- decryption</u>	QGW-A-365-1000	5Y	1	RNG5N02R1180 1300Y	745,91

Version in degree of protection IP65

Product description	Tariff	Group	Qty.	Part no.	Price (€)
Data supply 2 x per month					
Q gateway 5 V3.0 with <u>battery supply</u> with tariff	QGW-A-024-0000	5Y	1	RNG5N01R3180 13000	688,97
More on request.					

7.2.1 | Overview of tariffs Gateway Service Description (GSD) for Q gateway 5

Product description	Qty.	Part no.	Price (€) / year
data supply - twice per month	1	QGW-A-024-0000	65,88
data supply - twice per month incl. Q SMP- decryption	1	QGW-A-024-1000	77,88
data supply - once a week	1	QGW-A-052-0000	83,88
data supply - once a week incl. Q SMP- decryption	1	QGW-A-052-1000	95,88
data supply - daily	1	QGW-A-365-0000	143,88
data supply - daily incl. Q SMP- decryption	1	QGW-A-365-1000	155,88

You will find the corresponding descriptions of features in our customer portal.

Communication: Q AMR C-Mode

The **Q gateway 5.5 direct** receives data of all **QUNDIS metering devices in C Mode** as well as **wM-Bus compatible, unidirectional meters in C- and T Mode from other manufacturers** within the direct reception range.

Data transmission is via mobile radio (GPRS/EDGE/UMTS/HSPA). The Q gateway 5.5 direct is equipped and delivered ex works with a SIM card. All administrative and data acquisition tasks are performed via the QUNDIS Smart Metering Platform (Q SMP).

Important note: The Q gateway 5.5 direct is only sold in combination with the booking of a QUNDIS Gateway Service Contract (GSD) with a minimum contractual period of five years. If the tariff includes AES decryption, this functionality can be cancelled annually at the end of a contract year. It is also possible to switch from an existing tariff to the tariff including decryption functionality.

Please note! Excluded from repurchase.


Version in degree of protection IP42

Product description	Tariff	Group	Qty.	Part no.	Price (€)
Data supply 1 x per month					
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 250 measuring devices</u>	QGW-D-012-0000	5Z	1	RNG5002T3180 13008	785,77
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 250 measuring devices</u> and <u>incl. Q SMP- decryption</u>	QGW-D-012-1000	5Z	1	RNG5002T3180 1300N	785,77
Data supply 2 x per month					
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 400 measuring devices</u>	QGW-D-024-0000	5Z	1	RNG5002T3180 1300A	785,77
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 400 measuring devices</u> and <u>incl. Q SMP- decryption</u>	QGW-D-024-1000	5Z	1	RNG5002T3180 1300O	785,77
Data supply daily					
Q gateway 5.5 direct V3.0 with <u>power supply</u> with tariff for <u>maximum 250 measuring devices</u>	QGW-D-365-0000	5Z	1	RNG5002T1180 13009	896,81
Q gateway 5.5 direct V3.0 with <u>power supply</u> with tariff for <u>maximum 250 measuring devices</u> and <u>incl. Q SMP- decryption</u>	QGW-D-365-1000				on request

Version in degree of protection IP65

Product description	Tariff	Group	Qty.	Part no.	Price (€)
Data supply 1 x per month					
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 250 measuring devices</u>	QGW-D-012-0000	5Z	1	RNG5001T3180 13008	842,71
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 250 measuring devices</u> and <u>incl. Q SMP- decryption</u>	QGW-D-012-1000	5Z	1	RNG5001T3180 1300N	842,71
Data supply 2 x per month					
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 400 measuring devices</u>	QGW-D-024-0000	5Z	1	RNG5001T3180 1300A	842,71
Q gateway 5.5 direct V3.0 with <u>battery supply</u> with tariff for <u>maximum 400 measuring devices</u> and <u>incl. Q SMP- decryption</u>	QGW-D-024-1000	5Z	1	RNG5001T3180 1300O	842,71

7 | Further system components data readout Q AMR



7.2.2 | Overview of tariffs Gateway Service Description (GSD) for Q gateway 5.5 direct

Product description	Qty.	Part no.	Price (€) / year
Data supplied 1 x per month - max. 12 device scans per year / readout of <u>max. 250 metering devices</u>	1	QGW-D-012-0000	17,88
Data supplied 1 x per month - max. 12 device scans per year / readout of <u>max. 250 metering devices</u> - <u>incl. Q SMP- decryption</u>	1	QGW-D-012-1000	29,88
Data supplied 2 x per month - max. 24 device scans per year /readout of <u>max. 400 metering devices</u>	1	QGW-D-024-0000	38,28
Data supplied 2 x per month - max. 24 device scans per year / readout of <u>max. 400 metering devices</u> - <u>incl. Q SMP- decryption</u>	1	QGW-D-024-1000	50,28
Data supplied daily - max. 365 device scans per year / readout of <u>max. 250 metering devices</u>	1	QGW-D-365-0000	58,68
Data supplied daily - max. 365 device scans per year / readout of <u>max. 250 metering devices</u> - <u>incl. Q SMP- decryption</u>	1	QGW-D-365-1000	70,68

You will find the corresponding descriptions of features in our customer portal.

7 | Further system components data readout Q AMR



7.3 | The Gateway-Tariff-Solution for small Q AMR systems (max. 120 devices)

- Readout of max. 120 metering devices from one (1) Q AMR network
- Data delivery 1 x per month (tariff: QGW-A-012-0000) for an annual price of € 33.00
- Upgrade to standard tariff possible if max. number of devices is exceeded
- Minimum contract period 5 years

Please note! Gateway excluded from repurchase.

Version in degree of protection IP 42


Product description	Group	Qty.	Part no.	Price (€)
Data supply 1 x per month				
Q gateway 5 V3.0 (<u>battery supply</u>) with tariff for maximum 120 measuring devices	5Y	1	RNG5N02R3180 1300H	632,03
Q gateway 5 V3.0 (<u>battery supply</u>) with tariff for maximum 120 measuring devices <u>incl. Q SMP- decryption</u>				on request

7.3.1 | Overview of tariffs Gateway Service Description (GSD) referring to 7.3

Product description	Group	Qty.	Part no.	Price (€)
Data supply 1 x per month only together with solution package for small Q AMR systems (referring 7.3)		1	QGW-A-012-0000	33,00
Data supply 1 x per month <u>incl. Q SMP- decryption</u> only together with solution package for small Q AMR systems (referring 7.3)		1	QGW-A-012-1000	45,00

You will find the corresponding descriptions of features in our customer portal.

Q M-Bus systems are used for recording consumption data primarily from heat meters and water meters. Compared to radio systems, wired systems make sense wherever meters have to transmit instantaneous values or where a few meters for central recording are spread over a large area. In addition to the actual meters for heat and water, QUNDIS also supplies impulse input modules that provide data from devices with an impulse output for the Q M-Bus system. Central units, level converters and remote displays round off the product range.

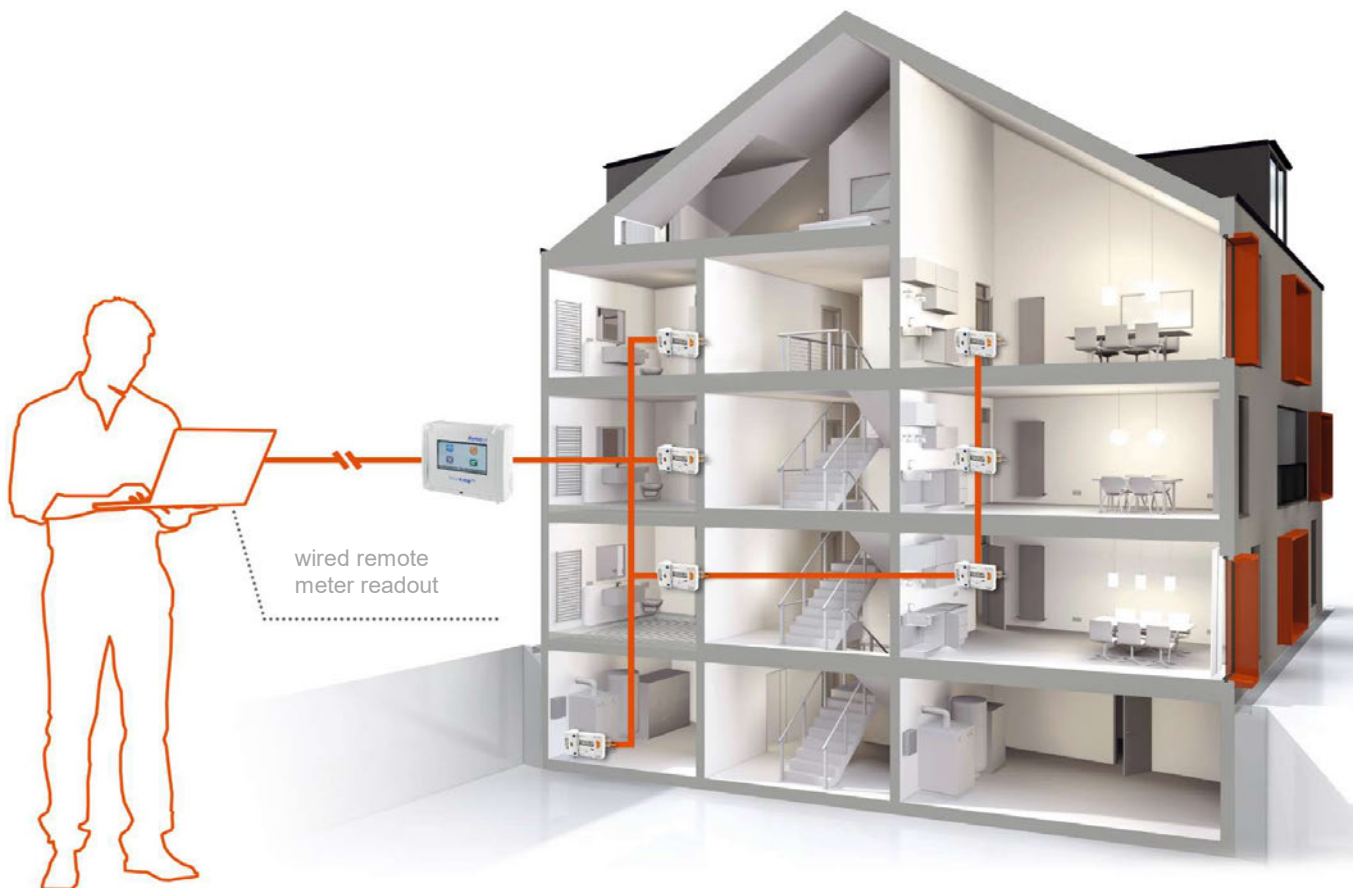

8 | Further system components data readout Q M-Bus



8.1 | Q module - M-Bus - Add-on module for mechanical water meter



M-Bus-modul for mechanical water meters of type MODULARIS

(suitable for mechanical water meters of type WEH, MAD SJ EVO or Q water domestic)



Product description	Group	Qty.	Part no.	Price (€)
M-Bus-add-on module	MK	1	MWMH00020000 Z0V10	59,26

8.2 | Q module - M-Bus - Add-on modules for heat meters



M-Bus modul for heat meter

suitable for heat meters of the series

- Q heat 5
- Q heat 5.5 (except Q heat 5.5 US)
- R 20/21 calculator units



Product description	Group	Qty.	Part no.	Price (€)
M-Bus-add-on module	MK	1	MHM500A20000 00000	67,36
M-Bus-add-on module with extended data telegram	MK	1	MHM500A20000 02000	67,36

8.3 | Q pulse - M-Bus - Impulse input module



M-Bus impulse adapter

suitable for meters with impulse output from various manufacturers; two pulse inputs can be connected; with M-Bus interface for simple parameterization via software


Water meters, heat meters, heat/cooling meters etc. with impulse output as well as electricity meters with S0 interface can be integrated (pulse converter may be required).



Product description	Group	Qty.	Part no.	Price (€)
Q pulse M-Bus	B1	1	MPAH00R22000 00R00	64,00

Application Software and Service Tools

Application Software and Service Tools can be found in our digital accessories price list (PDF) at www.qundis.com in the section „service/downloads-and-information/product-information“ and in Excel format in our customer portal.

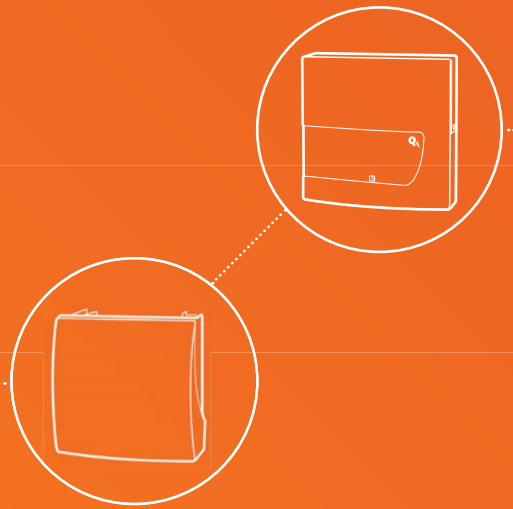

✉ **QUNDIS GmbH**
Sonnentor 2
99098 Erfurt/Deutschland
☎ +49 361 26 280-0
☎ +49 361 26 280-175
✉ info@qundis.com

www.qundis.com



Member of
noventic group